

## Appendix F: Noise Impact Analysis

THIS PAGE INTENTIONALLY LEFT BLANK

## Noise Impact Analysis Agua Mansa Logistics Center City of Colton, San Bernardino County, California

Prepared for:

**City of Colton**

Development Services Department  
659 North La Cadena Drive  
Colton, CA 92324

Contact: Mark Tomich, Development Services Director

Prepared by:

**FirstCarbon Solutions**

967 Kendall Drive, #A-537  
San Bernardino, CA 92407  
909.884.2255

Contact: Mary Bean, Project Director  
Philip Ault, Project Manager, Noise Scientist

Date: January 27, 2023

THIS PAGE INTENTIONALLY LEFT BLANK

## Table of Contents

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| <b>Acronyms and Abbreviations .....</b>                               | <b>v</b>  |
| <b>Section 1: Introduction .....</b>                                  | <b>1</b>  |
| 1.1 - Purpose of Analysis and Study Objectives.....                   | 1         |
| 1.2 - Project Summary .....                                           | 1         |
| 1.3 - Summary of Project-Related Noise Impacts.....                   | 2         |
| <b>Section 2: Noise and Vibration Fundamentals .....</b>              | <b>9</b>  |
| 2.1 - Characteristics of Noise .....                                  | 9         |
| 2.2 - Characteristics of Groundborne Vibration and Noise .....        | 13        |
| <b>Section 3: Regulatory Setting .....</b>                            | <b>17</b> |
| 3.1 - Federal Regulations .....                                       | 17        |
| 3.2 - State Regulations.....                                          | 18        |
| 3.3 - Local Regulations.....                                          | 19        |
| <b>Section 4: Existing Noise Conditions .....</b>                     | <b>21</b> |
| 4.1 - Existing Traffic Noise Levels .....                             | 21        |
| 4.2 - Existing Ambient Noise Levels .....                             | 22        |
| <b>Section 5: Thresholds of Significance and Impact Analysis.....</b> | <b>27</b> |
| 5.1 - Thresholds of Significance .....                                | 27        |
| 5.2 - Impact Analysis.....                                            | 27        |
| <br><b>Appendix A: Noise Modeling and Measurement Data</b>            |           |

## List of Tables

|                                                                                     |    |
|-------------------------------------------------------------------------------------|----|
| Table 1: Sound Terminology .....                                                    | 11 |
| Table 2: Typical Construction Equipment Maximum Noise Levels, $L_{max}$ .....       | 12 |
| Table 3: Vibration Levels of Construction Equipment .....                           | 14 |
| Table 4: Summary of EPA Recommended Noise Levels to Protect Public Welfare.....     | 17 |
| Table 5: Federal Transit Administration Construction Vibration Impact Criteria..... | 18 |
| Table 6: Land Use Compatibility Standards for Community Noise Environments.....     | 19 |
| Table 7: Existing Traffic Noise Levels.....                                         | 21 |
| Table 8: Existing Ambient Noise Levels in the Project Vicinity .....                | 23 |
| Table 9: Traffic Noise Increase Summary.....                                        | 30 |
| Table 10: Stationary Operational Noise Impact Summary .....                         | 34 |

## List of Exhibits

|                                                 |    |
|-------------------------------------------------|----|
| Exhibit 1: Regional Location Map .....          | 3  |
| Exhibit 2: Local Vicinity Map, Aerial Base..... | 5  |
| Exhibit 3: Site Plan .....                      | 7  |
| Exhibit 4: Noise Monitoring Locations.....      | 25 |

THIS PAGE INTENTIONALLY LEFT BLANK

## ACRONYMS AND ABBREVIATIONS

|           |                                               |
|-----------|-----------------------------------------------|
| ADT       | Average Daily Traffic                         |
| Caltrans  | California Department of Transportation       |
| CEQA      | California Environmental Quality Act          |
| CNEL      | Community Noise Equivalent Level              |
| COA       | Condition of Approval                         |
| CUP       | Conditional Use Permit                        |
| dB        | decibel                                       |
| dBA       | A-weighted decibel                            |
| DNL       | Day-Night Level                               |
| EIR       | Environmental Impact Report                   |
| EPA       | United States Environmental Protection Agency |
| FCS       | FirstCarbon Solutions                         |
| FWHA      | Federal Highway Administration                |
| FTA       | Federal Transit Administration                |
| GPU       | General Plan Update                           |
| in/sec    | inch per second                               |
| $L_{dn}$  | day-night average sound level                 |
| $L_{eq}$  | equivalent continuous sound level             |
| $L_{max}$ | maximum noise/sound level                     |
| $L_{min}$ | minimum noise/sound level                     |
| MM        | Mitigation Measure                            |
| OSHA      | Occupational Safety and Health Administration |
| PPV       | peak particle velocity                        |
| rms       | root mean square                              |
| VdB       | vibration in decibels                         |

THIS PAGE INTENTIONALLY LEFT BLANK

## SECTION 1: INTRODUCTION

### 1.1 - Purpose of Analysis and Study Objectives

This Noise Impact Analysis has been prepared by FirstCarbon Solutions (FCS) to identify, evaluate, and disclose the off-site and on-site noise impacts associated with the proposed Agua Mansa Logistics Center (proposed project). The following is provided in this report:

- A description of the study area, project site, and proposed project
- Information regarding the fundamentals of noise and vibration
- A description of the local noise guidelines and standards
- A description of the existing noise environment
- An analysis of the potential short-term, construction-related noise and vibration impacts from the proposed project
- An analysis of long-term, operations-related noise and vibration impacts from the proposed project
- A comparison of project impacts with the impact findings of the 2013 General Plan Update Environmental Impact Report (EIR)

### 1.2 - Project Summary

#### 1.2.1 - Project Location

The approximately 59-acre Agua Mansa Logistics Center is located in the City of Colton, in San Bernardino County, California (Exhibit 1). The project site is located north of the Santa Ana River, south of Agua Mansa Road, east of South Rancho Avenue, and west of South Riverside Avenue (Exhibit 2). The project site is located at 1500 West Agua Mansa Road (Assessor's Parcel Numbers [APNs] 0260-072-08, -12, -13; 0275-041-07, -08, -09, -27, -28, -29, -30, and -30.) The project site is currently vacant with no existing structures present. A 30-foot easement for North Riverside and Jurupa Canal currently runs through the center of the site in a northwest to southeast direction. Surrounding land uses include industrial development to the north; a river, a river trail, industrial development, and landfill to the south; a Wastewater Treatment Plant, a vacant field, and a single residence to the east; and a warehouse and associated parking lot to the west.

#### 1.2.2 - Project Description

The project applicant, IDI Logistics, proposes to develop two industrial warehouse buildings totaling 930,466 square feet and associated driveways, parking lots, sidewalks, curbs, fencing, gates, lighting, and landscaping on the approximately 59-acre project site, which is currently vacant (Exhibit 3). Building 1 would be a 2-story, 474,021-square-foot automated freezer facility with 77,564 square feet of mezzanine space located on approximately 35 acres in the western portion of the project site. The first level would support the loading dock and employees, and the second level would be for

office administration with a staff of approximately 10 to 15 employees. Because 90 percent of this facility would either be automated or mechanical, the total occupant load would be greatly reduced (compared to typical warehouse operations) with a total of approximately 60 people per shift, which in turn reduces the need for on-site parking. Building 2 would be a 456,445-square-foot speculative concrete tilt-up structure constructed on approximately 24 acres in the eastern portion of the project site. Building 1 would require City approval of a parking variance and a Conditional Use Permit (CUP) to increase the maximum allowable height from 50 to 130 feet.


The total required parking spaces would be 314 stalls for Building 1 and 269 stalls for Building 2. The proposed project would provide a total of 114 automobile parking spaces for Building 1, and 270 automobile parking spaces for Building 2, for a total of 384 automobile parking spaces. The proposed project would provide 519 trailer stalls: 378 stalls for Building 1, and 141 stalls for Building 2. Bicycle racks would also be provided.

Fencing on the project site would include an 8-foot-tall black painted tubular steel picket fence that would be installed around the perimeter of the western and southern perimeters of the project site, as well as a 12-foot-tall painted concrete screen wall that would be installed along the northern perimeter of the project site and around the parking lot in the center of the site.

### 1.3 - Summary of Project-Related Noise Impacts

Implementation of the proposed project would result in potential short-term construction and long-term operational noise and groundborne vibration impacts. The analysis shows that construction noise impacts would be reduced to less than significant with implementation of the Condition of Approval (COA), which requires restricted hours for construction activities and implementation of best management noise reduction techniques and practices. The analysis further shows that project-related mobile and stationary noise sources would not result in substantial increases in ambient noise levels and the impacts would be less than significant. Construction and operational groundborne vibration impacts are also shown to result in less than significant impacts to off-site sensitive receptors. The analysis also demonstrates that implementation of the proposed project would not expose persons residing or working in the project vicinity to noise levels from airport activity that would be in excess of normally acceptable standards for the proposed land use development, and no related noise impact would occur.

These findings are consistent with the findings of the 2013 General Plan Update EIR. The EIR identified that projected long-term traffic volumes would increase noise by less than significant levels with continued implementation of General Plan policies. Implementation of the General Plan Update (GPU) would also result in less than significant impacts for groundborne vibration or groundborne noise levels. The EIR determined also that implementation of the GPU would not expose people residing or working within two miles of any public airport nor private airport to excessive noise levels associated with air traffic. Overall, the EIR concluded that potentially significant noise impacts will be avoided through effective implementation of existing and Noise Element and Municipal Code policies, including Municipal Code Section 8.108.020, which states that “It is unlawful for any person to make, continue or cause to be made or continued any loud, unnecessary and excessive noise which disturbs, offends, injures or endangers the peace, quiet, comfort, repose, health or safety of any neighborhood or person within the limits of the City.”

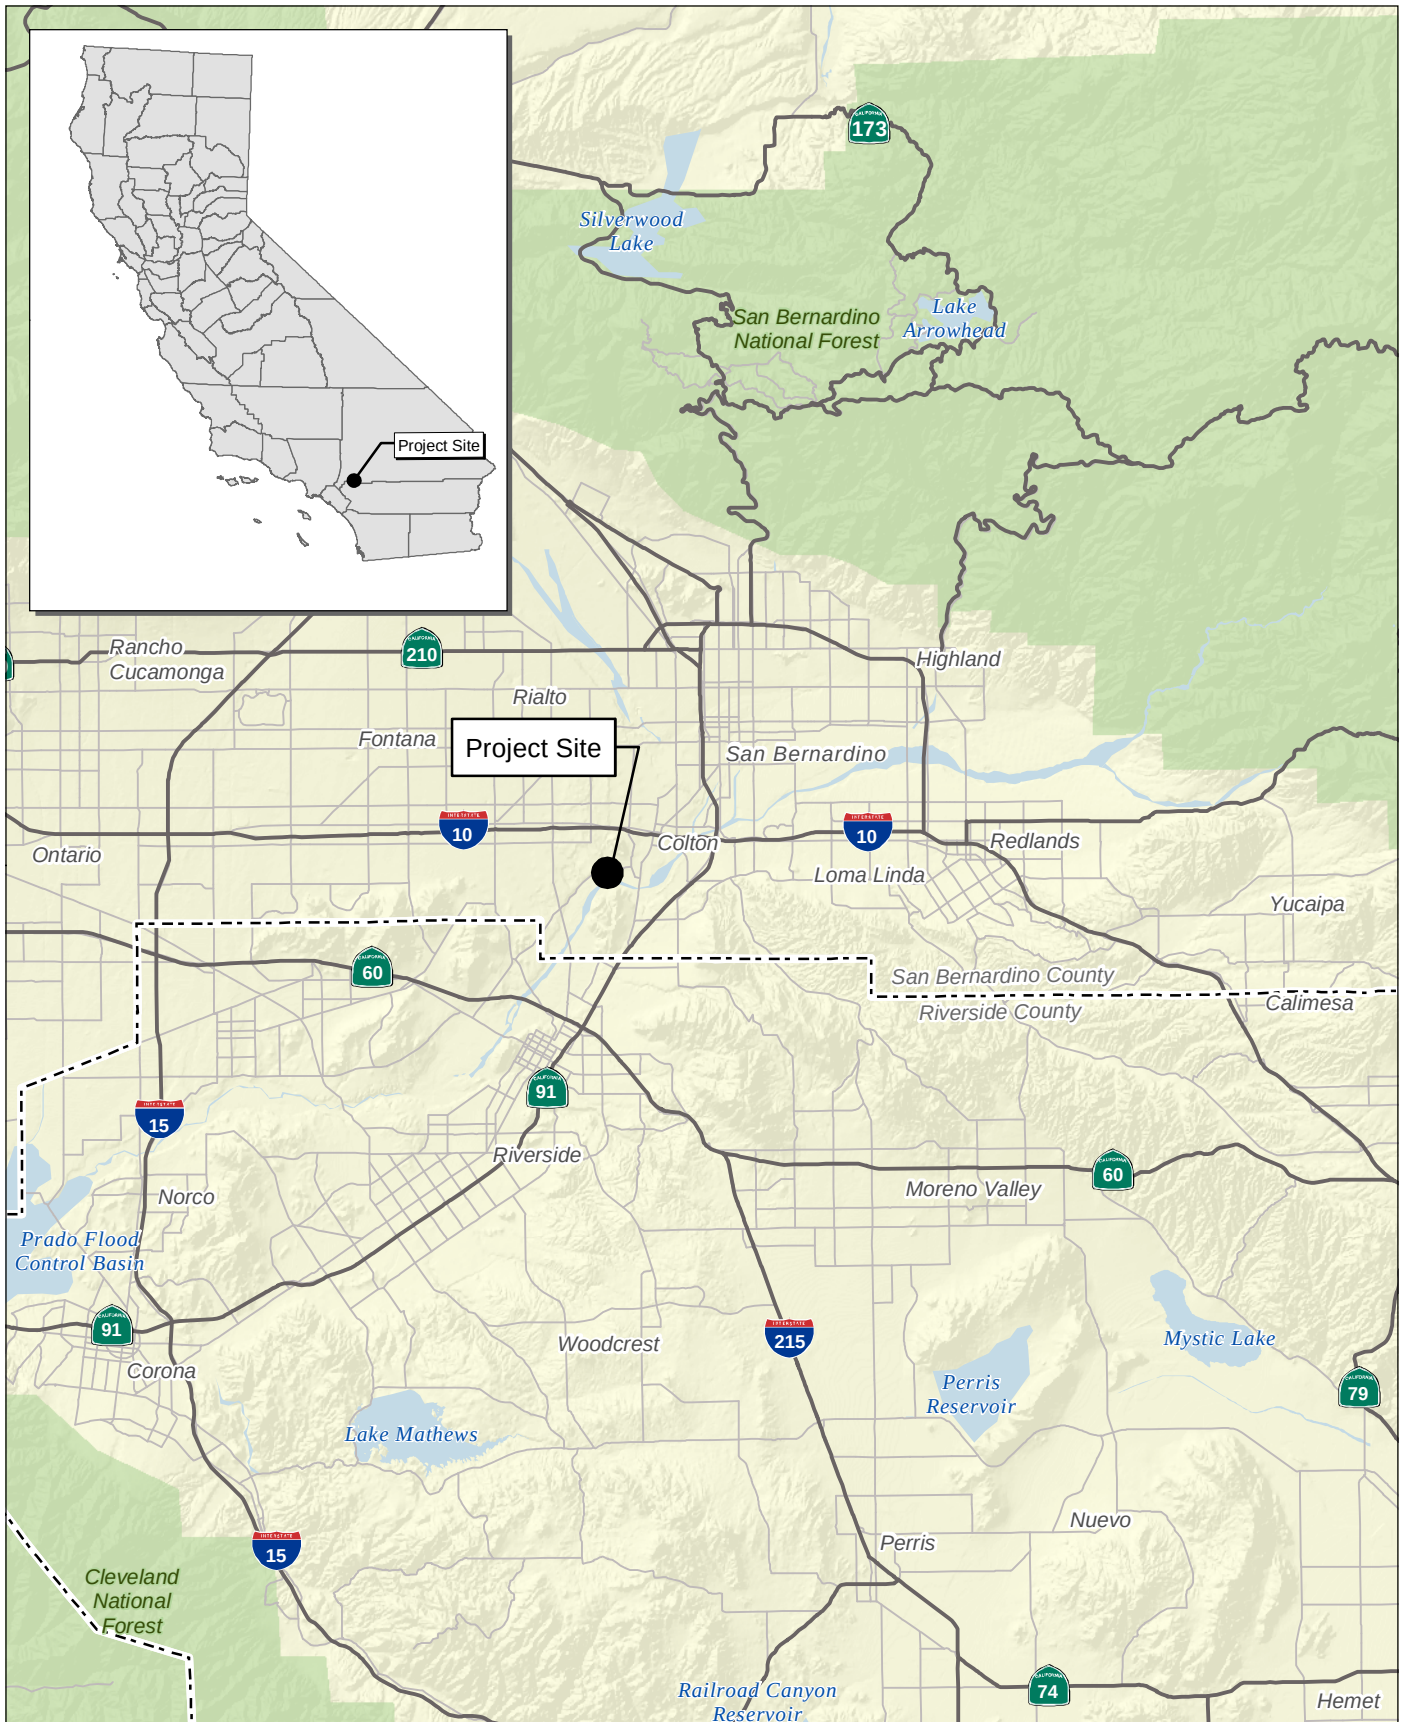

Source: Census 2000 Data, The California Spatial Information Library (CaSIL).

**FIRSTCARBON**  
SOLUTIONS™




5 2.5 0 5  
Miles

## Exhibit 1 Regional Location Map

THIS PAGE INTENTIONALLY LEFT BLANK




Source: Bing Aerial Imagery.



# Exhibit 2 Local Vicinity Map

THIS PAGE INTENTIONALLY LEFT BLANK

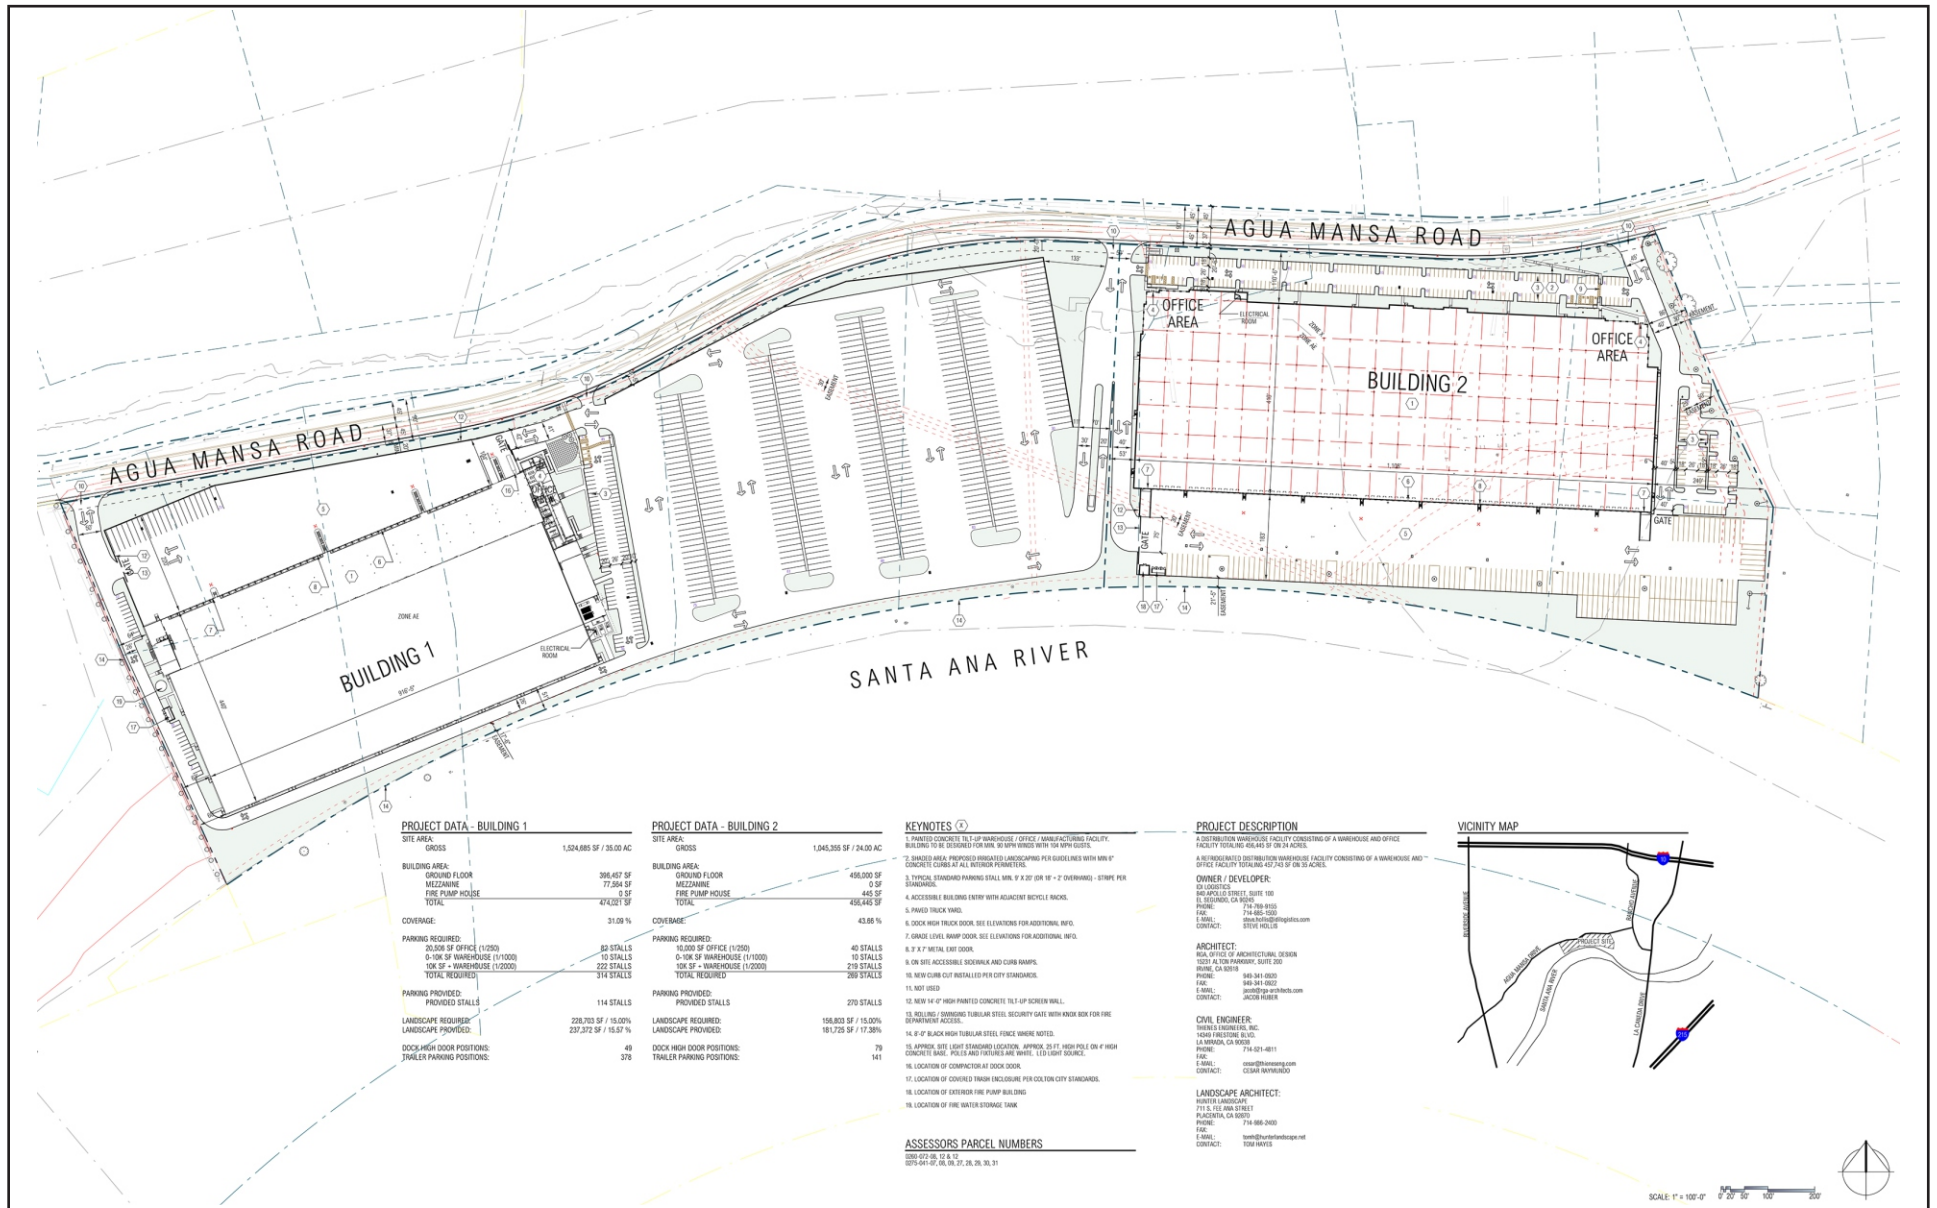

Source: RGA Office of Architectural Design, March 02, 2022.

THIS PAGE INTENTIONALLY LEFT BLANK

## SECTION 2: NOISE AND VIBRATION FUNDAMENTALS

### 2.1 - Characteristics of Noise

Noise is generally defined as unwanted or objectionable sound. Sound becomes unwanted when it interferes with normal activities, when it causes actual physical harm, or when it has adverse effects on health. The effects of noise on people can include general annoyance, interference with speech communication, sleep disturbance, and in the extreme, hearing impairment. Noise effects can be caused by pitch or loudness. *Pitch* is the number of complete vibrations or cycles per second of a wave that result in the range of tone from high to low; higher-pitched sounds are louder to humans than lower-pitched sounds. *Loudness* is the intensity or amplitude of sound.

Sound is produced by the vibration of sound pressure waves in the air. Sound pressure levels are used to measure the intensity of sound and are described in terms of decibels. The decibel (dB) is a logarithmic unit, which expresses the ratio of the sound pressure level being measured to a standard reference level. The 0 point on the dB scale is based on the lowest sound level that the healthy, unimpaired human ear can detect. Changes of 3 dB or less are only perceptible in laboratory environments. Audible increases in noise levels generally refer to a change of 3 dB or more, as this level has been found to be barely perceptible to the human ear in outdoor environments. Only audible changes in existing ambient or background noise levels are considered potentially significant.

The human ear is not equally sensitive to all frequencies within the audible sound spectrum, so sound pressure level measurements can be weighted to better represent frequency-based sensitivity of average healthy human hearing. One such specific “filtering” of sound is called “A-weighting.” A-weighted decibels (dBA) approximate the subjective response of the human ear to a broad frequency noise source by discriminating against very low and very high frequencies of the audible spectrum. They are adjusted to reflect only those frequencies that are audible to the human ear. Because decibels are logarithmic units, they cannot be added or subtracted by ordinary arithmetic means. For example, if one noise source produces a noise level of 70 dB, the addition of another noise source with the same noise level would not produce 140 dB; rather, they would combine to produce a noise level of 73 dB.

As noise spreads from a source, it loses energy so that the farther away the noise receiver is from the noise source, the lower the perceived noise level. Noise levels diminish or attenuate as distance from the source increases based on an inverse square rule, depending on how the noise source is physically configured. Noise levels from a single-point source, such as a single piece of construction equipment at ground level, attenuate at a rate of 6 dB for each doubling of distance (between the single-point source of noise and the noise-sensitive receptor of concern). Heavily traveled roads with few gaps in traffic behave as continuous line sources and attenuate roughly at a rate of 3 dB per doubling of distance.

### 2.1.1 - Noise Descriptors

There are many ways to rate noise for various time periods, but an appropriate rating of ambient noise affecting humans also accounts for the annoying effects of sound. Equivalent continuous sound level ( $L_{eq}$ ) is the total sound energy of time-varying noise over a sample period. However, the predominant rating scales for human communities in the State of California are the  $L_{eq}$  and community noise equivalent level (CNEL) or the day-night average level ( $L_{dn}$ ) based on dBA. CNEL is the time-varying noise over a 24-hour period, with a 5 dBA weighting factor applied to the hourly  $L_{eq}$  for noises occurring from 7:00 p.m. to 10:00 p.m. (defined as relaxation hours) and a 10 dBA weighting factor applied to noise occurring from 10:00 p.m. to 7:00 a.m. (defined as sleeping hours).  $L_{dn}$  is similar to the CNEL scale but without the adjustment for events occurring during the evening hours. CNEL and  $L_{dn}$  are within 1 dBA of each other and are normally exchangeable. The noise adjustments are added to the noise events occurring during the more sensitive hours.

Other noise rating scales of importance when assessing the annoyance factor include the maximum noise level ( $L_{max}$ ), which is the highest exponential time-averaged sound level that occurs during a stated time period. The noise environments discussed in this analysis are specified in terms of maximum levels denoted by  $L_{max}$  for short-term noise impacts.  $L_{max}$  reflects peak operating conditions and addresses the annoying aspects of intermittent noise.

### 2.1.2 - Noise Propagation

From the noise source to the receiver, noise changes both in level and frequency spectrum. The most obvious is the decrease in noise as the distance from the source increases. The manner in which noise reduces with distance depends on whether the source is a point or line source, as well as ground absorption, atmospheric conditions (wind, temperature gradients, and humidity) and refraction, and shielding by natural and man-made features. Sound from point sources, such as an air conditioning condenser, a piece of construction equipment, or an idling truck, radiates uniformly outward as it travels away from the source in a spherical pattern.

The attenuation or sound drop-off rate is dependent on the conditions of the land between the noise source and receiver. To account for this ground-effect attenuation (absorption), two types of site conditions are commonly used in noise models: soft-site and hard-site conditions. Soft-site conditions account for the sound propagation loss over natural surfaces such as normal earth and ground vegetation. For point sources, a drop-off rate of 7.5 dBA/DD is typically observed over soft ground with landscaping, as compared with a 6 dBA/DD drop-off rate over hard ground such as asphalt, concrete, stone and very hard packed earth. For line sources, such as traffic noise on a roadway, a 4.5 dBA/DD is typically observed for soft-site conditions compared to the 3 dBA/DD drop-off rate for hard-site conditions. Table 1 briefly defines these measurement descriptors and other sound terminology used in this section.

**Table 1: Sound Terminology**

| Term                                                         | Definition                                                                                                                                                                                                                                                               |
|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sound                                                        | A vibratory disturbance created by a vibrating object which, when transmitted by pressure waves through a medium such as air, can be detected by a receiving mechanism such as the human ear or a microphone.                                                            |
| Noise                                                        | Sound that is loud, unpleasant, unexpected, or otherwise undesirable.                                                                                                                                                                                                    |
| Ambient Noise                                                | The composite of noise from all sources near and far in a given environment.                                                                                                                                                                                             |
| Decibel (dB)                                                 | A unitless measure of sound on a logarithmic scale, which represents the squared ratio of sound pressure amplitude to a reference sound pressure. The reference pressure is 20 micropascals, representing the threshold of human hearing (0 dB).                         |
| A-Weighted Decibel (dBA)                                     | An overall frequency-weighted sound level that approximates the frequency response of the human ear.                                                                                                                                                                     |
| Equivalent Noise Level ( $L_{eq}$ )                          | The average sound energy occurring over a specified time period. In effect, $L_{eq}$ is the steady-state sound level that in a stated period would contain the same acoustical energy as the time-varying sound that actually occurs during the same period.             |
| Maximum and Minimum Noise Levels ( $L_{max}$ and $L_{min}$ ) | The maximum or minimum instantaneous sound level measured during a measurement period.                                                                                                                                                                                   |
| Day-Night Level (DNL or $L_{dn}$ )                           | The energy average of the A-weighted sound levels occurring during a 24-hour period, with 10 dB added to the A-weighted sound levels occurring between 10:00 p.m. and 7:00 a.m. (nighttime).                                                                             |
| Community Noise Equivalent Level (CNEL)                      | The energy average of the A-weighted sound levels occurring during a 24-hour period, with 5 dB added to the A-weighted sound levels occurring between 7:00 p.m. and 10:00 p.m. and 10 dB added to the A-weighted sound levels occurring between 10:00 p.m. and 7:00 a.m. |
| Source: Data compiled by FirstCarbon Solutions (FCS) 2022.   |                                                                                                                                                                                                                                                                          |

### 2.1.3 - Traffic Noise

The level of traffic noise depends on three primary factors: (1) the volume of the traffic, (2) the speed of the traffic, and (3) the number of trucks in the flow of traffic. Generally, the loudness of traffic noise is increased by heavier traffic volumes, higher speeds, and greater number of trucks. Vehicle noise is a combination of the noise produced by the engine, exhaust, and tires. Because of the logarithmic nature of noise levels, a doubling of the traffic volume (assuming that the speed and truck mix do not change) results in a noise level increase of 3 dBA. Based on the Federal Highway

Administration (FHWA) community noise assessment criteria, this change is “barely perceptible.” For reference, a doubling of perceived noise levels would require an increase of approximately 10 dBA. The truck mix on a given roadway also has an effect on community noise levels. As the number of heavy trucks increases and becomes a larger percentage of the vehicle mix, adjacent noise levels increase.

### 2.1.4 - Stationary Noise

A stationary noise producer is any entity in a fixed location that emits noise. Examples of stationary noise sources include machinery, engines, energy production, and other mechanical or powered equipment and activities such as loading and unloading or public assembly that may occur at commercial, industrial, manufacturing, or institutional facilities. Furthermore, while noise generated by the use of motor vehicles over public roads is preempted from local regulation, the use of these vehicles is considered a stationary noise source when operated on private property such as at a construction site, a truck terminal, or warehousing facility.

The effects of stationary noise depend on factors such as characteristics of the equipment and operations, distance and pathway between the generator and receptor, and weather. Stationary noise sources may be regulated at the point of manufacture (e.g., equipment or engines), with limitations on the hours of operation, or with provision of intervening structures, barriers, or topography.

Construction activities are a common source of stationary noise. Construction period noise levels are higher than background ambient noise levels but eventually cease once construction is complete. Construction is performed in discrete steps, each of which has its own mix of equipment and, consequently, its own noise characteristics. These various sequential phases would change the character of the noise generated on each construction site and, therefore, would change the noise levels as construction progresses. Despite the variety in the type and size of construction equipment, similarities in the dominant noise sources and patterns of operation allow construction-related noise ranges to be categorized by work phase. Table 2 shows typical noise levels of construction equipment as measured at a distance of 50 feet from the operating equipment.

**Table 2: Typical Construction Equipment Maximum Noise Levels,  $L_{max}$**

| Type of Equipment     | Impact Device? (Yes/No) | Specification Maximum Sound Levels for Analysis (dBA at 50 feet) |
|-----------------------|-------------------------|------------------------------------------------------------------|
| Impact Pile Driver    | Yes                     | 95                                                               |
| Auger Drill Rig       | No                      | 85                                                               |
| Vibratory Pile Driver | No                      | 95                                                               |
| Jackhammers           | Yes                     | 85                                                               |
| Pneumatic Tools       | No                      | 85                                                               |
| Pumps                 | No                      | 77                                                               |
| Scrapers              | No                      | 85                                                               |
| Cranes                | No                      | 85                                                               |
| Portable Generators   | No                      | 82                                                               |

| Type of Equipment                                                                                                                       | Impact Device? (Yes/No) | Specification Maximum Sound Levels for Analysis (dBA at 50 feet) |
|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------------------------------------------------------|
| Rollers                                                                                                                                 | No                      | 85                                                               |
| Bulldozers                                                                                                                              | No                      | 85                                                               |
| Tractors                                                                                                                                | No                      | 84                                                               |
| Front-End Loaders                                                                                                                       | No                      | 80                                                               |
| Backhoe                                                                                                                                 | No                      | 80                                                               |
| Excavators                                                                                                                              | No                      | 85                                                               |
| Graders                                                                                                                                 | No                      | 85                                                               |
| Air Compressors                                                                                                                         | No                      | 80                                                               |
| Dump Truck                                                                                                                              | No                      | 84                                                               |
| Concrete Mixer Truck                                                                                                                    | No                      | 85                                                               |
| Pickup Truck                                                                                                                            | No                      | 55                                                               |
| Notes:<br>dBA = A-weighted decibel<br>Source: Federal Highway Administration (FHWA). 2006. Highway Construction Noise Handbook. August. |                         |                                                                  |

### 2.1.5 - Noise from Multiple Sources

Because sound pressure levels in decibels are based on a logarithmic scale, they cannot be added or subtracted in the usual arithmetical way. Therefore, sound pressure levels in decibels are logarithmically added on an energy summation basis. In other words, adding a new noise source to an existing noise source, both producing noise at the same level, would not double the noise level. Instead, if the difference between two noise sources is 10 dBA or more, the louder noise source would dominate, and the resultant noise level would be equal to the noise level of the louder source. In general, if the difference between two noise sources is 0–1 dBA, the resultant noise level would be 3 dBA higher than the louder noise source, or both sources if they are equal. If the difference between two noise sources is 2–3 dBA, the resultant noise level would be 2 dBA above the louder noise source. If the difference between two noise sources is 4–10 dBA, the resultant noise level would be 1 dBA higher than the louder noise source.

## 2.2 - Characteristics of Groundborne Vibration and Noise

Groundborne vibration consists of rapidly fluctuating motion through a solid medium, specifically the ground that has an average motion of zero and in which the motion's amplitude can be described in terms of displacement, velocity, or acceleration. The effects of groundborne vibration typically only causes a nuisance to people, but in extreme cases, excessive groundborne vibration has the potential to cause structural damage to buildings. Although groundborne vibration can be felt outdoors, it is typically only an annoyance to people indoors where the associated effects of the shaking of a building can be notable. Groundborne noise is an effect of groundborne vibration and only exists indoors, since it is produced from noise radiated from the motion of the walls and floors of a room, and may also consist of the rattling of windows or dishes on shelves.

Several different methods are used to quantify vibration amplitude such as the maximum instantaneous peak in the vibrations velocity, which is known as the peak particle velocity (PPV) or the root mean square (rms) amplitude of the vibration velocity. Because of the typically small amplitudes of vibrations, vibration velocity is often expressed in decibels—denoted as LV—and is based on the reference quantity of 1 microinch per second. To distinguish these vibration levels referenced in decibels from noise levels referenced in decibels, the unit is written as “VdB.”

Although groundborne vibration can be felt outdoors, it is typically only an annoyance to people indoors where the associated effects of the shaking of a building can be notable. When assessing annoyance from groundborne vibration, vibration is typically expressed as rms velocity in units of decibels of 1 microinch per second, with the unit written in VdB. Typically, developed areas are continuously affected by vibration velocities of 50 VdB or lower. Human perception to vibration starts at levels as low as 67 VdB. Annoyance due to vibration in residential settings starts at approximately 70 VdB.

Off-site sources that may produce perceptible vibrations are usually caused by construction equipment, steel-wheeled trains, and traffic on rough roads, while smooth roads rarely produce perceptible groundborne noise or vibration. Construction activities, such as blasting, pile driving and operating heavy earthmoving equipment, are common sources of groundborne vibration. Construction vibration impacts on building structures are generally assessed in terms of PPV. Typical vibration source levels from construction equipment are shown in Table 3.

**Table 3: Vibration Levels of Construction Equipment**

| Construction Equipment | PPV at 25 Feet (inches/second) | rms Velocity in Decibels (VdB)<br>at 25 Feet |
|------------------------|--------------------------------|----------------------------------------------|
| Water Trucks           | 0.001                          | 57                                           |
| Scraper                | 0.002                          | 58                                           |
| Bulldozer—small        | 0.003                          | 58                                           |
| Jackhammer             | 0.035                          | 79                                           |
| Concrete Mixer         | 0.046                          | 81                                           |
| Concrete Pump          | 0.046                          | 81                                           |
| Paver                  | 0.046                          | 81                                           |
| Pickup Truck           | 0.046                          | 81                                           |
| Auger Drill Rig        | 0.051                          | 82                                           |
| Backhoe                | 0.051                          | 82                                           |
| Crane (Mobile)         | 0.051                          | 82                                           |
| Excavator              | 0.051                          | 82                                           |
| Grader                 | 0.051                          | 82                                           |
| Loader                 | 0.051                          | 82                                           |
| Loaded Trucks          | 0.076                          | 86                                           |

| Construction Equipment                                                                                                                                                                                                       | PPV at 25 Feet (inches/second) | rms Velocity in Decibels (VdB) at 25 Feet |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------------------------------|
| Bulldozer—Large                                                                                                                                                                                                              | 0.089                          | 87                                        |
| Caisson drilling                                                                                                                                                                                                             | 0.089                          | 87                                        |
| Vibratory Roller (small)                                                                                                                                                                                                     | 0.101                          | 88                                        |
| Compactor                                                                                                                                                                                                                    | 0.138                          | 90                                        |
| Clam shovel drop                                                                                                                                                                                                             | 0.202                          | 94                                        |
| Vibratory Roller (large)                                                                                                                                                                                                     | 0.210                          | 94                                        |
| Pile Driver (impact-typical)                                                                                                                                                                                                 | 0.644                          | 104                                       |
| Pile Driver (impact-upper range)                                                                                                                                                                                             | 1.518                          | 112                                       |
| Notes:<br>PPV = peak particle velocity<br>rms = root mean square<br>VdB = velocity in decibels<br>Source: Compilation of scientific and academic literature, generated by the Federal Transit Administration (FTA) and FHWA. |                                |                                           |

The propagation of groundborne vibration is not as simple to model as airborne noise. This is because noise in the air travels through a relatively uniform medium, while groundborne vibrations travel through the earth, which may contain significant geological differences. Factors that influence groundborne vibration include:

- **Vibration source:** Type of activity or equipment, such as impact or mobile, and depth of vibration source;
- **Vibration path:** Soil type, rock layers, soil layering, depth to water table, and frost depth; and
- **Vibration receiver:** Foundation type, building construction, and acoustical absorption.

Among these factors that influence groundborne vibration, there are significant differences in the vibration characteristics when the source is underground compared to at the ground surface. In addition, soil conditions are known to have a strong influence on the levels of groundborne vibration. Among the most important factors are the stiffness and internal damping of the soil and the depth to bedrock. Vibration propagation is more efficient in stiff clay soils than in loose sandy soils, and shallow rock seems to concentrate the vibration energy close to the surface and can result in groundborne vibration problems at large distance from the source. Factors such as layering of the soil and depth to the water table can have significant effects on the propagation of groundborne vibration. Soft, loose, sandy soils tend to attenuate more vibration energy than hard, rocky materials. Vibration propagation through groundwater is more efficient than through sandy soils. There are three main types of vibration propagation: surface, compression, and shear waves. Surface waves, or Rayleigh waves, travel along the ground's surface. These waves carry most of their energy along an expanding circular wave front, similar to ripples produced by throwing a rock into a pool of water. P-waves, or compression waves, are body waves that carry their energy along an expanding spherical wave front. The particle motion in these waves is longitudinal (i.e., in a "push-pull" fashion). P-waves

are analogous to airborne sound waves. S-waves, or shear waves, are also body waves that carry energy along an expanding spherical wave front. However, unlike P-waves, the particle motion is transverse, or side-to-side and perpendicular to the direction of propagation.

As vibration waves propagate from a source, the vibration energy decreases in a logarithmic nature and the vibration levels typically decrease by 6 VdB per doubling of the distance from the vibration source. As stated above, this drop-off rate can vary greatly depending on the soil type, but it has been shown to be effective enough for screening purposes, in order to identify potential vibration impacts that may need to be studied through actual field tests. The vibration level (calculated below as PPV) at a distance from a point source can generally be calculated using the vibration reference equation:

$$PPV = PPV_{ref} * (25/D)^n \text{ (in/sec)}$$

Where:

PPV<sub>ref</sub>=reference measurement at 25 feet from vibration source

D=distance from equipment to property line

N=vibration attenuation rate through ground

According to Section 7 of the Federal Transit Administration (FTA) Transit Noise and Vibration Impact Assessment Manual, an “n” value of 1.5 is recommended to calculate vibration propagation through typical soil conditions.<sup>1</sup>

<sup>1</sup> Federal Transit Administration (FTA). 2018. Transit Noise and Vibration Impact Assessment Manual. September.

## SECTION 3: REGULATORY SETTING

### 3.1 - Federal Regulations

#### 3.1.1 - United States Environmental Protection Agency

In 1972, Congress enacted the Noise Control Act. This act authorized the United States Environmental Protection Agency (EPA) to publish descriptive data on the effects of noise and establish levels of sound “requisite to protect the public welfare with an adequate margin of safety.” These levels are separated into health (hearing loss levels) and welfare (annoyance levels) categories, as shown in Table 4. The EPA cautions that these identified levels are not standards because they do not take into account the cost or feasibility of the levels.

For protection against hearing loss, 96 percent of the population would be protected if sound levels are less than or equal to an  $L_{eq(24)}$  of 70 dBA. The EPA activity and interference guidelines are designed to ensure reliable speech communication at about 5 feet in the outdoor environment. For outdoor and indoor environments, interference with activity and annoyance should not occur if levels are below 55 dBA and 45 dBA, respectively.

**Table 4: Summary of EPA Recommended Noise Levels to Protect Public Welfare**

| Effect                                                                                                                                                                                                                                                | Level                   | Area                                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hearing loss                                                                                                                                                                                                                                          | $L_{eq(24)} \leq 70$ dB | All areas                                                                                                                                                           |
| Outdoor activity interference and annoyance                                                                                                                                                                                                           | $L_{dn} \leq 55$ dB     | Outdoors in residential areas, farms, and other outdoor areas where people spend widely varying amounts of time and other places in which quiet is a basis for use. |
|                                                                                                                                                                                                                                                       | $L_{eq(24)} \leq 55$ dB | Outdoor areas where people spend limited amounts of time, such as school yards, playgrounds, etc.                                                                   |
| Indoor activity interference and annoyance                                                                                                                                                                                                            | $L_{eq} \leq 45$ dB     | Indoor residential areas.                                                                                                                                           |
|                                                                                                                                                                                                                                                       | $L_{eq(24)} \leq 45$ dB | Other indoor areas with human activities such as schools, etc.                                                                                                      |
| Notes:<br>dB = decibel<br>$L_{eq}$ = equivalent continuous sound level<br>(24) signifies an $L_{eq}$ duration of 24 hours.<br>Source: United States Environmental Protection Agency (EPA). 1978. Protective Noise Levels, EPA 550/9-79-100. November. |                         |                                                                                                                                                                     |

#### 3.1.2 - Federal Transit Administration

The FTA has established industry accepted standards for vibration impact criteria and impact assessment. These guidelines are published in its Transit Noise and Vibration Impact Assessment

Manual.<sup>2</sup> The FTA guidelines include thresholds for construction vibration impacts for various structural categories as shown in Table 5.

**Table 5: Federal Transit Administration Construction Vibration Impact Criteria**

| Building Category                                                                                                                                                                                                                                                           | PPV (in/sec) | Approximate VdB |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------|
| I. Reinforced—Concrete, Steel or Timber (no plaster)                                                                                                                                                                                                                        | 0.5          | 102             |
| II. Engineered Concrete and Masonry (no plaster)                                                                                                                                                                                                                            | 0.3          | 98              |
| III. Non-engineered Timber and Masonry Buildings                                                                                                                                                                                                                            | 0.2          | 94              |
| IV. Buildings Extremely Susceptible to Vibration Damage                                                                                                                                                                                                                     | 0.12         | 90              |
| Notes:<br>PPV = peak particle velocity<br>rms = root mean square<br>VdB = vibration measured as rms velocity in decibels of 1 microinch per second.<br>Source: Federal Transit Administration (FTA). 2018. Transit Noise and Vibration Impact Assessment Manual. September. |              |                 |

## 3.2 - State Regulations

The State of California has established regulations that help prevent adverse impacts to occupants of buildings located near noise sources. Referred to as the “State Noise Insulation Standard,” it requires buildings to meet performance standards through design and/or building materials that would offset any noise source in the vicinity of the receptor. State regulations include requirements for the construction of new hotels, motels, apartment houses, and dwellings other than detached single-family dwellings that are intended to limit the extent of noise transmitted into habitable spaces. These requirements are found in the California Code of Regulations, Title 24 (known as the Building Standards Administrative Code), Part 2 (known as the California Building Standards Code), Appendix Chapters 12 and 12A. For limiting noise transmitted between adjacent dwelling units, the noise insulation standards specify the extent to which walls, doors, and floor-ceiling assemblies must block or absorb sound. For limiting noise from exterior noise sources, the noise insulation standards set an interior standard of 45 dBA CNEL in any habitable room with all doors and windows closed. In addition, the standards require preparation of an acoustical analysis demonstrating the manner in which dwelling units have been designed to meet this interior standard, where such units are proposed in an area with exterior noise levels greater than 60 dBA CNEL.

The proposed project does not include any type of residential development. Therefore, these standards are not applicable to the proposed project. However, the State has established land use compatibility guidelines for determining acceptable noise levels for specified land uses, including industrial type land uses such as the proposed project, which the City of Colton has adopted as described below.

<sup>2</sup> Federal Transit Administration (FTA). 2018. Transit Noise and Vibration Impact Assessment Manual. September.

### 3.3 - Local Regulations

The City of Colton addresses noise in the Noise Element of the City of Colton General Plan<sup>3</sup> and in the City's Municipal Code,<sup>4</sup> as discussed below.

#### City of Colton General Plan

The City of Colton General Plan, Noise Element, establishes land use compatibility standards for the City of Colton. The General Plan Land Use Compatibility Standards for Community Noise Environments are shown in Table 6. Of these, the land use category that most closely applies to the proposed project is industrial, manufacturing, utilities, and agriculture. For this designation, 75 dBA CNEL is considered to be the “normally acceptable” noise level for this type of land use t.

**Table 6: Land Use Compatibility Standards for Community Noise Environments**

| Land Use Category                                           | Community Noise Exposure in Decibels (CNEL)<br>Day/Night Average Noise Level in Decibels (L <sub>dn</sub> ) |    |    |    |    |    |  |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|----|----|----|----|----|--|
|                                                             | 55                                                                                                          | 60 | 65 | 70 | 75 | 80 |  |
| Residential—Low Density Single-Family, Duplex, Mobile Homes |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
| Residential—Multi-family                                    |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
| Transient Lodging—Motels, Hotels                            |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
| Schools, Libraries, Churches, Hospitals, Nursing Homes      |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
| Sports Arena, Outdoor Spectator Sports                      |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |
|                                                             |                                                                                                             |    |    |    |    |    |  |

<sup>3</sup> City of Colton. 1987. City of Colton General Plan Noise Element.

<sup>4</sup> City of Colton. 2020. City of Colton Municipal Code. April 27.

| Land Use Category                                                                                                                               |                                                                                                                                                                                                                          | Community Noise Exposure in Decibels (CNEL)<br>Day/Night Average Noise Level in Decibels (L <sub>dn</sub> ) |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|-------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|----|----|
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             | 55 | 60                                                                                                                                                                                                                                                                 | 65 | 70 | 75 | 80 |
| Playgrounds, Neighborhood Parks                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
| Golf Courses, Riding Stables, Water Recreation, Cemeteries                                                                                      |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
| Office Buildings                                                                                                                                |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
| Industrial, Manufacturing, Utilities, Agriculture                                                                                               |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |
|                                                                                                                                                 | NORMALLY ACCEPTABLE<br>Specified land use is satisfactory, based upon the assumption that any buildings involved are of normal conventional construction, without any special noise insulation requirements.             |                                                                                                             |    | NORMALLY UNACCEPTABLE<br>New construction or development should be discouraged. If new construction or development does proceed, a detailed analysis of the noise reduction requirements must be made and needed noise insulation features included in the design. |    |    |    |    |
|                                                                                                                                                 | CONDITIONALLY ACCEPTABLE<br>New construction or development should be undertaken only after a detailed analysis of the noise reduction requirements is made and needed noise insulation features included in the design. |                                                                                                             |    | CLEARLY UNACCEPTABLE<br>New construction or development clearly should not be undertaken.                                                                                                                                                                          |    |    |    |    |
| Notes:<br>CNEL = Community Noise Equivalent Level; L <sub>dn</sub> = day/night average sound level<br>Source: City of Colton General Plan 1987. |                                                                                                                                                                                                                          |                                                                                                             |    |                                                                                                                                                                                                                                                                    |    |    |    |    |

### City of Colton Municipal Code

The City of Colton establishes its noise performance standards in the City's Municipal Code. The noise ordinance (Title 18, Chapter 18.42, § 18.42.040) establishes a threshold of 65 dBA as the maximum operational sound level permitted to be generated, when measured at the boundary line of the property on which the sound is generated. While the City does not indicate the noise metric for this performance threshold, for purposes of this analysis it is assumed the applicable noise metric is an hourly average noise exposure level (65 dBA L<sub>eq(h)</sub>) applicable to all daytime and nighttime hours.

The City also addresses vibration impacts by restricting a project's operations so as not to generate ground vibration by equipment (other than motor vehicles, trains, or by temporary construction or demolition) which is perceptible without instruments by the average person at or beyond any lot line of the lot containing the activities.

## SECTION 4: EXISTING NOISE CONDITIONS

Existing noise sources in the project area include noise from traffic on Agua Mansa to the north and South Rancho Avenue to the east.

Other noise sources in the project vicinity include industrial and commercial operations to the north, south, east, and west of the project site. The existing ambient noise levels in the project vicinity were documented through traffic noise modeling of existing traffic conditions and through ambient noise monitoring.

### 4.1 - Existing Traffic Noise Levels

Existing traffic noise levels along selected roadway segments in the project vicinity were modeled using the FHWA Traffic Noise Prediction Model (FHWA-RD-77-108). The daily traffic volumes were obtained from the traffic analysis prepared for the proposed project by Urban Crossroads.<sup>5</sup> The traffic volumes described here correspond to the existing without project conditions traffic scenario as described in the transportation analysis. The model inputs and outputs—including the 60 dBA, 65 dBA, and 70 dBA CNEL noise contour distances—are provided in Appendix A of this document. A summary of the modeling results is shown in Table 7.

As is shown in Table 7, traffic noise levels range up to 73.3 dBA CNEL at 50-feet from the outermost travel lane on roadway segments near the project site. The proposed project consists of industrial uses that have no sensitive areas related to noise; therefore, exterior noise levels experienced due to traffic or train noise in the area would not exceed the City’s land use compatibility standards for the proposed land use.

**Table 7: Existing Traffic Noise Levels**

| Roadway Segment                                          | Approximate ADT | Centerline to 70 CNEL (feet) | Centerline to 65 CNEL (feet) | Centerline to 60 CNEL (feet) | CNEL (dBA) 50 feet from Centerline of Outermost Lane |
|----------------------------------------------------------|-----------------|------------------------------|------------------------------|------------------------------|------------------------------------------------------|
| Agua Mansa Road—east of Project Driveway 1               | 9,400           | 93                           | 199                          | 429                          | 73.3                                                 |
| Agua Mansa Road—Project Driveway 2 to Project Driveway 1 | 9,400           | 93                           | 199                          | 429                          | 73.3                                                 |
| Agua Mansa Road—Project Driveway 3 to Project Driveway 2 | 9,400           | 93                           | 199                          | 429                          | 73.3                                                 |
| Agua Mansa Road—Project Driveway 4 to Project Driveway 3 | 9,400           | 93                           | 199                          | 429                          | 73.3                                                 |

<sup>5</sup> Urban Crossroads, Inc. 2022. Agua Mansa Logistics Center Traffic Analysis. July 25.

| Roadway Segment                                                                                                                                                                                                                                                                                                                                                                                                                | Approximate ADT | Centerline to 70 CNEL (feet) | Centerline to 65 CNEL (feet) | Centerline to 60 CNEL (feet) | CNEL (dBA) 50 feet from Centerline of Outermost Lane |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------------------|------------------------------|------------------------------|------------------------------------------------------|
| Agua Mansa Road–South Rancho Avenue to Project Driveway 4                                                                                                                                                                                                                                                                                                                                                                      | 9,400           | 93                           | 199                          | 429                          | 73.3                                                 |
| Notes:<br>ADT = Average Daily Traffic<br>CNEL = Community Noise Equivalent Level<br>dBA = A-weighted decibel<br><sup>1</sup> Modeling results do not take into account mitigating features such as topography, vegetative screening, fencing, building design, or structure screening. Rather, they assume a worst-case scenario of having a direct line of site on flat terrain.<br>Source: FirstCarbon Solutions (FCS) 2022. |                 |                              |                              |                              |                                                      |

## 4.2 - Existing Ambient Noise Levels

The existing noise environment in the project vicinity was documented through ambient noise monitoring. Noise monitoring was conducted at the locations shown in Exhibit 4, and the noise measurement data sheets are included in Appendix A of this document. Three short-term noise measurements (15-minutes each) were taken on Thursday, March 4, 2021, and one long-term (24-hour) noise measurement was taken from 11:54 a.m. on Thursday, March 4, 2021, to 1:12 p.m. on Friday, March 5, 2021. The short-term noise measurements were taken between 10:40 a.m. and 11:40 a.m., on Thursday, March 4, 2021, during the morning peak noise hour. These measurements provide a baseline for existing noise conditions in the project vicinity.

The noise measurement locations were taken in compliance with the methodology and site selection guidance of the California Department of Transportation (Caltrans) Technical Noise Supplement. The short-term measurements were taken at the nearest appropriate point to roadway segments adjacent to residential receptors surrounding the project boundaries.

### Short-term Noise Measurements

The short-term noise measurements taken at the project site are summarized in Table 8. The noise measurements indicate that daytime ambient noise levels range from 70.9 dBA to 72.6 dBA  $L_{eq}$  at nearby residential land uses in the project vicinity. The noise technician observed that the dominant noise sources in the project vicinity are traffic noise from large trucks and smaller vehicles and construction activity noise in the project vicinity.

### Long-term Noise Measurement

The long-term noise measurement (LT-1) was conducted near the northern boundary of the project site, adjacent to Agua Mansa Road (Exhibit 4) and adjacent to one of the nearest off-site residential receptors. The 24-hour average ambient noise levels at this location averaged 75.9 dBA CNEL, with daytime average noise levels of 72.2 dBA  $L_{eq}$ , and nighttime average noise levels of 68.4 dBA  $L_{eq}$ . Documented maximum noise levels at this location ranged up to 95.5 dBA  $L_{max}$ . Measured ambient noise levels at this location exceeded 65 dBA for fewer than 10-minutes total of the 24-hour period measured. The noise technician observed that the dominant noise sources in the project vicinity during the 24-hour noise measurement were vehicle traffic on the local roadway.

**Table 8: Existing Ambient Noise Levels in the Project Vicinity**

| Site Location                                                                                                                                                                                   | Location Description                                                                                             | dBA                  | Primary Noise Sources                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------------|
| ST-1                                                                                                                                                                                            | 10 feet North of Agua Mansa Road and 180 feet west of the residential property to the north of Agua Mansa Road   | 72.6 L <sub>eq</sub> | Large truck traffic, vehicle traffic                       |
| ST-2                                                                                                                                                                                            | Southwest property line of residential property north of Agua Mansa Road                                         | 72.1 L <sub>eq</sub> | Vehicle traffic                                            |
| ST-3                                                                                                                                                                                            | 10 feet north of Agua Mansa Road and 115 feet east of the residential property north of Agua Mansa Road          | 70.9 L <sub>eq</sub> | Vehicle traffic and operations at nearby construction site |
| LT-1                                                                                                                                                                                            | On telephone pole north of Agua Mansa Road and 65 feet west of the residential property north of Agua Mansa Road | 75.9 CNEL            | Vehicle traffic                                            |
| <p>Notes:<br/>           CNEL = Community Noise Equivalent Level<br/>           L<sub>eq</sub> = equivalent continuous sound level<br/>           Source: FirstCarbon Solutions (FCS) 2022.</p> |                                                                                                                  |                      |                                                            |

THIS PAGE INTENTIONALLY LEFT BLANK



Source: Google Earth Aerial Imagery.



THIS PAGE INTENTIONALLY LEFT BLANK

## SECTION 5: THRESHOLDS OF SIGNIFICANCE AND IMPACT ANALYSIS

### 5.1 - Thresholds of Significance

According to the California Environmental Quality Act (CEQA) Guidelines Appendix G, to determine whether impacts related to noise and vibration are significant environmental effects, the following questions should be considered and evaluated.

Would the proposed project:

- a) Generate a substantial temporary or permanent increase in ambient noise levels in the vicinity of the project in excess of standards established in the local general plan or noise ordinance, or applicable standards of other agencies?
- b) Generate excessive groundborne vibration or groundborne noise levels?
- c) For a project located within the vicinity of a private airstrip or an airport land use plan or, where such a plan has not been adopted, within two miles of a public airport or public use airport, would the project expose people residing or working in the project area to excessive noise levels?

### 5.2 - Impact Analysis

#### 5.2.1 - Substantial Noise Increase in Excess of Standards

##### Construction Noise Impacts

For the purposes of this analysis, a significant impact would occur if construction activities would result in a substantial temporary increase in ambient noise levels in the vicinity of the proposed project in excess of standards established in the local general plan, noise ordinance, or applicable standards of other agencies that would result in annoyance or sleep disturbance of nearby sensitive receptors.

The City of Colton's noise ordinance has not established noise performance standards for construction activities. Therefore, this noise study uses the construction noise performance standards found in the County of San Bernardino Development Code which restricts such noise producing construction activity to daytime hours.<sup>6</sup> Specifically, the County of San Bernardino Development Code, Section 83.01.080, indicates that noise producing construction activities are restricted to between the hours of 7:00 a.m. and 7:00 p.m. Mondays to Saturday, with no such activity permitted on Sundays or Federal holidays.

Like the City of Colton, the County of San Bernardino does not establish a numeric maximum acceptable construction source noise level for nearby potentially affected receivers, which would allow for a quantified determination of what CEQA constitutes a substantial temporary or periodic

<sup>6</sup> County of San Bernardino. 2007. 2007 Development Code. March 13. Website: <https://www.sbcounty.gov/Uploads/lus/DevelopmentCode/DCWebsite.pdf>. Accessed August 22, 2022.

noise increase. Therefore, to evaluate whether the proposed project would generate a substantial periodic increase in short-term noise levels at off-site sensitive receptor locations, the following guidelines from the FTA are applied as reasonable criteria for assessing construction-related noise level impacts. A one-hour (h)  $L_{eq}$  of 90 dBA is identified as a noise level threshold for construction noise at nearby sensitive receptors in residential areas.

Therefore, for the purposes of this analysis, a significant impact would occur if noise producing construction activity were to occur outside the County's permitted hours or if the project's construction activity noise levels would exceed the FTA's construction noise threshold of 90  $L_{eq(h)}$  dBA as measured at a sensitive receiving land use in the project vicinity.

### **Construction-related Traffic Noise**

Noise impacts from construction activities associated with the proposed project would be a function of the noise generated by construction equipment, equipment location, sensitivity of nearby land uses, and the timing and duration of the construction activities. One type of short-term noise impacts that could occur during project construction would result from the increase in traffic flow on local streets, associated with the transport of workers, equipment, and materials to and from the project site. The transport of workers and construction equipment and materials to the project site would incrementally increase noise levels on access roads leading to the site. Because workers and construction equipment would use existing routes, noise from passing trucks would be similar to existing vehicle-generated noise on these local roadways. Typically, a doubling of the Average Daily Traffic (ADT) hourly volumes on a roadway segment is required in order to result in an increase of 3 dBA in traffic noise levels; which, as discussed in the characteristics of noise discussion above, is the lowest change that can be perceptible to the human ear in outdoor environments. Based on the project-specific Agua Mansa Logistics Traffic Analysis,<sup>7</sup> ADT volumes along roadway segments accessing the project site are 9,500, and AM and PM peak-hour traffic volumes average 1,800 or greater trips per hour on these local roadway segments. Daily project-related construction trips would be well below these existing traffic volumes and would not double the hourly or daily traffic volumes along any roadway segment in the project vicinity. For this reason, short-term intermittent noise from construction trips would not result in a perceptible increase in hourly- or daily-average traffic noise levels in the project vicinity. Therefore, short-term construction-related noise impacts associated with the transportation of workers and equipment to the project site would be less than significant.

### **Construction Equipment Operational Noise**

The second type of short-term noise impact is related to noise generated during construction on the project site. Construction is completed in discrete steps, each of which has its own mix of equipment and, consequently, its own noise characteristics. These various sequential phases would change the character of the noise generated on the site and, therefore, the noise levels surrounding the site as construction progresses. Despite the variety in the type and size of construction equipment, similarities in the dominant noise sources and patterns of operation allow construction-related noise ranges to be categorized by work phase. Table 1 lists typical construction equipment noise levels based on a distance of 50 feet between the equipment and a noise receptor. Typical operating cycles

<sup>7</sup> Urban Crossroads, Inc. 2022. Agua Mansa Logistics Center Traffic Analysis. July 25.

for these types of construction equipment may involve 1 or 2 minutes of full power operation followed by 3 or 4 minutes at lower power settings. Impact equipment such as pile drivers are not expected to be used during construction of this project.

The site preparation phase, which includes excavation and grading of the site, tends to generate the highest noise levels because the noisiest construction equipment is earthmoving equipment. Earthmoving equipment includes excavating machinery and compacting equipment, such as bulldozers, draglines, backhoes, front loaders, roller compactors, scrapers, and graders. Typical operating cycles for these types of construction equipment may involve 1 or 2 minutes of full power operation followed by 3 or 4 minutes at lower power settings.

Based on the air quality modeling assumptions, construction of the proposed project is expected to require the use of scrapers/crawler tractors, rubber-tired dozers/backhoes, cranes, forklifts, generators, welders, and air compressors. Based on the information provided in Table 2, the maximum noise level generated by each scraper is assumed to be 85 dBA  $L_{max}$  at 50 feet from this equipment. Each dozer/backhoe would also generate 85 dBA  $L_{max}$  at 50 feet. The maximum noise level generated by cranes is approximately 85 dBA  $L_{max}$  at 50 feet. A characteristic of sound is that each doubling of sound sources with equal strength increases a sound level by 3 dBA. Assuming that each piece of construction equipment operates at some distance from the other equipment, a reasonable worst-case combined noise level during this phase of construction would be 90 dBA  $L_{max}$  at a distance of 50 feet from the acoustic center of a construction area. This would result in a reasonable worst-case hourly average of 86 dBA  $L_{eq(h)}$ , at a distance of 50 feet from the acoustic center of a construction area when multiple pieces of heavy equipment operate simultaneously in relatively the same location for an hour period. The acoustic center reference is used because construction equipment must operate at some distance from one another on a project site, and the combined noise level as measured at a point equidistant from the sources (acoustic center) would be the worst-case maximum noise level. The effect on sensitive receptors is evaluated below.

The closest noise-sensitive receptor to the project site is the single-family residence located east of the project site on Agua Mansa Road. The façade of this closest home would be located approximately 45 feet from the acoustic center of construction activity where multiple pieces of heavy construction equipment would operate simultaneously. At this distance, construction noise levels could range up to approximately 82 dBA  $L_{max}$ , with a relative worst-case hourly average of 78 dBA  $L_{eq(h)}$  at this receptor. These noise levels could occur temporarily under the reasonable worst-case scenario of multiple pieces of heavy construction equipment operating simultaneously in relatively the same locations at the nearest project boundary for an hour period. These noise levels would drop off at a rate of 6 dBA per doubling of distance as the equipment moves over the site and operates at greater distances from off-site receptors.

Again, the significance threshold for construction noise impacts is whether noise producing construction activity would occur outside the City's permitted hours or would exceed the FTA's construction noise threshold of 90  $L_{eq(h)}$  dBA as measured at a sensitive receiving land use in the project vicinity. As shown in this analysis, the reasonable worst-case hourly average construction noise levels are below the FTA's construction noise threshold of 90 dBA  $L_{eq(h)}$  for nearby sensitive receptors in residential areas.

However, these construction activities could result in relatively high single event noise exposure potential causing an intermittent noise nuisance or a temporary increase in ambient noise levels in the project vicinity that could result in annoyance or sleep disturbance of nearby sensitive receptors unless restricted to daytime hours. Therefore, limiting hours of construction to daytime hours only and implementing the best management noise reduction techniques and practices outlined in the COA would ensure that construction noise would not result in a substantial temporary increase in ambient noise levels that would result in annoyance or sleep disturbance of nearby sensitive receptors. Therefore, with implementation of the COA, temporary construction noise impacts would be reduced to a less than significant level.

### Mobile Source Operational Noise Impacts

A significant impact would occur if project-generated traffic would result in a substantial increase in ambient noise levels compared with those that would exist without the proposed project. The City does not define “substantial increase,” therefore for purpose of this analysis, a substantial increase is based on the following criteria. A characteristic of noise is that audible increases in noise levels generally refer to a change of 3 dBA or more, as this level has been found to be barely perceptible to the human ear in outdoor environments. As noted in the 2013 General Plan Update EIR, a 5 dBA increase is considered a readily noticeable to most people, while a 10 dBA increase is perceived by most people as a doubling of the existing noise level. Therefore, for purposes of this analysis, a significant impact would occur if the proposed project would cause the CNEL to increase by any of the following:

- 5 dBA or more even if the CNEL would remain below normally acceptable levels for a receiving land use.
- 3 dBA or more, thereby causing the CNEL in the project vicinity to exceed normally acceptable levels and result in noise levels that would be considered conditionally acceptable for a receiving land use.
- 1.5 dBA or more where the CNEL currently exceeds conditionally acceptable levels.

Table 9 shows a summary of the traffic noise levels for opening year no project (2024), Opening Year Plus Project, year 2040 No Project, and year 2040 Plus Project, as measured at 50 feet from the centerline of the outermost travel lane. These daily traffic volumes were obtained from the traffic analysis prepared for the proposed project by Urban Crossroads.<sup>8</sup>

**Table 9: Traffic Noise Increase Summary**

| Roadway Segment                                           | Opening Year, No Project (dBA) CNEL | Opening Year Plus Project (dBA) CNEL | Increase from Baseline Conditions (dBA) | Year 2040 No Project (dBA) CNEL | Year 2040 Plus Project (dBA) CNEL | Increase from Baseline Conditions (dBA) |
|-----------------------------------------------------------|-------------------------------------|--------------------------------------|-----------------------------------------|---------------------------------|-----------------------------------|-----------------------------------------|
| Agua Mansa Road–South Rancho Avenue to Project Driveway 4 | 74.5                                | 75.0                                 | 0.5                                     | 74.7                            | 75.2                              | 0.5                                     |

<sup>8</sup> Urban Crossroads, Inc. 2022. Agua Mansa Logistics Center Traffic Analysis. July 25.

| Roadway Segment                                                                                                            | Opening<br>Year, No<br>Project<br>(dBA)<br>CNEL | Opening<br>Year Plus<br>Project<br>(dBA) CNEL | Increase<br>from<br>Baseline<br>Conditions<br>(dBA) | Year 2040<br>No Project<br>(dBA) CNEL | Year 2040<br>Plus Project<br>(dBA) CNEL | Increase<br>from<br>Baseline<br>Conditions<br>(dBA) |
|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------------------------------------------|-----------------------------------------------------|---------------------------------------|-----------------------------------------|-----------------------------------------------------|
| Agua Mansa Road–Project Driveway 4 to Project Driveway 3                                                                   | 74.5                                            | 74.9                                          | 0.4                                                 | 74.7                                  | 75.1                                    | 0.4                                                 |
| Agua Mansa Road–Project Driveway 3 to Project Driveway 2                                                                   | 74.5                                            | 74.7                                          | 0.2                                                 | 74.7                                  | 75.0                                    | 0.3                                                 |
| Agua Mansa Road–Project Driveway 2 to Project Driveway 1                                                                   | 74.5                                            | 74.6                                          | 0.1                                                 | 74.7                                  | 74.9                                    | 0.2                                                 |
| Agua Mansa Road–east of Project Driveway 1                                                                                 | 74.5                                            | 74.6                                          | 0.1                                                 | 74.7                                  | 74.9                                    | 0.2                                                 |
| Notes:<br>dBA = A-weighted decibel<br>CNEL – Community Noise Equivalent Level<br>Source: FirstCarbon Solutions (FCS) 2022. |                                                 |                                               |                                                     |                                       |                                         |                                                     |

As shown in Table 9, the highest traffic noise level increase with implementation of the proposed project would occur along Agua Mansa Road between South Rancho Avenue and Project Driveway 4, under plus project conditions. Along this roadway segment, under Year 2040 plus project conditions, the proposed project would result in traffic noise levels ranging up to 75.2 dBA CNEL as measured at 50 feet from the centerline of the nearest travel lane, representing an increase of 0.5 dBA over without project conditions for this roadway segment. The resulting noise levels exceed the normally acceptable threshold for receiving residential land uses adjacent to this roadway segment. However, the project increases are all well below the 1.5 dBA increase that would be considered a substantial permanent increase in noise levels compared with noise levels that would exist without the proposed project. Therefore, project-related traffic noise levels would not result in a substantial permanent increase in traffic noise levels in excess of applicable standards and this would represent a less than significant impact.

### Stationary Source Operational Noise Impacts

A significant impact would occur if operational noise levels generated by stationary noise sources at the proposed project site would result in a substantial permanent increase in ambient noise levels in excess of any of the noise performance thresholds established in the City’s Municipal Code. According to these noise performance standards, stationary noise sources are not permitted to exceed 65 dBA  $L_{eq}$  when measured at the boundary line of the property on which the sound is generated. While the City does not indicate the noise metric for this performance threshold, for the purposes of this analysis it is assumed the applicable noise metric is an hourly average noise exposure level (65 dBA  $L_{eq(h)}$ ). This threshold applies to any 60-minute period, day or night.

As noted in the characteristics of noise discussion, audible increases in noise levels generally refer to a change of 3 dBA or more, as this level has been found to be barely perceptible to the human ear in outdoor environments. A change of 5 dBA is considered the minimum readily perceptible change to

the human ear in outdoor environments. Therefore, for purposes of this analysis, an increase of more than 3 dBA above the applicable noise performance thresholds would be considered a substantial permanent increase in ambient noise levels.

The proposed project would include new stationary noise sources, including parking lot activities, truck loading and unloading activities, and mechanical ventilation equipment.

### ***Parking Lot Activities***

Typical parking lot activities include people conversing, doors shutting, and vehicles idling which generate noise levels ranging from approximately 60 dBA to 70 dBA  $L_{max}$  at 50 feet. These activities are expected to occur sporadically throughout the day as cars and trucks arrive and leave the project site.

The nearest acoustic center for proposed parking lot activities would be located as close as 40 feet from the nearest project boundary. As a reasonable worst-case scenario, this analysis assumed a minimum of one parking movement for every parking stall nearest a single point along the project boundary within a single hour. The resulting hourly average noise levels associated with daily parking lot activities would be approximately 61 dBA  $L_{eq}$  at any single point along any project boundary line. The calculation spreadsheet with the detailed modeling assumptions is included in Appendix A of this document.

These noise levels would not result in an increase of 3 dBA above the City's daytime and nighttime hourly average noise performance threshold of 65 dBA  $L_{eq(h)}$  for stationary noise sources as measured at the nearest project boundary. These noise levels would be even lower as measured at off-site receptors. In addition, these noise levels are well below the existing average daily noise levels as measured at the nearest off-site residential receptor land uses, as shown in Table 8. Therefore, operational parking lot activity noise levels would not result in a substantial permanent increase in ambient noise levels in excess of the City's noise performance threshold, and this impact would be less than significant.

### ***Truck Loading and Unloading Activities***

Noise would be generated by loading and unloading activities at the loading zones along the north side of the proposed warehouse Building 1 and on the south side of Building 2 (see Exhibit 3). Typical noise levels from truck loading and unloading activity can range from 70 dBA to 80 dBA  $L_{max}$  as measured at 50 feet. These maximum noise levels include noise from associated truck loading/unloading activity, including trucks maneuvering, truck loading, truck unloading, backup alarms or beepers, and truck docking noise sources. Reasonable worst-case hourly average noise levels, assuming a truck loading/unloading activity at every loading dock in a single hour, would result in noise levels of approximately 75 dBA  $L_{eq}$  as measured at 100 feet from the nearest loading dock. These activities are expected to occur sporadically throughout the day and night and would not be continuous.

Proposed truck loading docks are located as close as 145 feet from the nearest project boundary. As a reasonable worst-case scenario, this analysis assumed a truck loading event at each loading dock in a single hour for each loading dock on this building. The resulting hourly average noise levels associated with daily truck loading activities would be approximately 65 dBA  $L_{eq(h)}$  at the nearest

point along the boundary line of the project site. The calculation spreadsheet with the detailed modeling assumptions is included in Appendix A of this document.

These noise levels would not result in an increase of 3 dBA above the City's daytime and nighttime hourly average noise performance threshold of 65 dBA  $L_{eq(h)}$  for stationary noise sources as measured at the nearest project boundary. These noise levels would be even lower as measured at off-site receptors. In addition, these noise levels are well below the existing average daily noise levels as measured at the nearest off-site residential receptor land uses, as shown in Table 8. Therefore, operational truck loading activity noise levels would not result in a substantial permanent increase in ambient noise levels in excess of the City's noise performance threshold, and this impact would be less than significant.

### ***Mechanical Ventilation Equipment***

Implementation of the proposed project could include operation of new rooftop mechanical ventilation equipment on the proposed warehouses, which would be a new stationary noise source in the project vicinity. At the time of preparation of this analysis, specific details of rooftop mechanical ventilation systems were not available; therefore, a reference noise level for typical rooftop mechanical ventilation systems was used. Noise levels from typical commercial-grade mechanical ventilation equipment systems range up to approximately 60 dBA  $L_{eq}$  at a distance of 25 feet. The rooftop mechanical ventilation systems could be located as close as 100 feet from the nearest project boundary. At this distance, these mechanical ventilation system operational noise levels would attenuate to below 48 dBA  $L_{eq}$ , as measured at the nearest boundary line of the project site. These noise levels would not result in an increase of 3 dBA above the City's daytime and nighttime hourly average noise performance threshold of 65 dBA  $L_{eq(h)}$  for stationary noise sources as measured at the nearest project boundary. These noise levels would be even lower as measured at off-site receptors. In addition, these noise levels are well below the existing average daily noise levels as measured at the nearest off-site residential receptor land uses, as shown in Table 8. Therefore, mechanical ventilation equipment noise levels would not result in a substantial permanent increase in ambient noise levels in excess of the City's noise performance threshold, and this impact would be less than significant.

### ***Stationary Source Operational Noise Impact Conclusion***

As shown in the analysis above, none of the project stationary operational noise sources would result in an increase of 3 dBA or greater above the City's daytime and nighttime hourly average noise performance threshold of 65 dBA  $L_{eq(h)}$  for stationary noise sources as measured at the nearest project boundary. Therefore, noise impacts from stationary operational noise sources would be less than significant. Table 10 provides a summary of the stationary source operation noise impacts.

**Table 10: Stationary Operational Noise Impact Summary**

| Source<br>(Reference Noise Levels)                                                                                                                                        | Approximate<br>Distance from<br>Source to Nearest<br>Project Boundary<br>(feet) | Operational Noise<br>Level as Measured<br>at the Project<br>Boundary | City's Noise<br>Performance<br>Threshold | Exceed<br>Threshold by<br>3 dBA or<br>greater?<br>(Yes/No) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------|------------------------------------------|------------------------------------------------------------|
| Parking Lot Activities<br>(60 dBA to 70 dBA $L_{max}$ at 50 feet)                                                                                                         | 40                                                                              | 61 dBA $L_{eq}$                                                      | 65 dBA $L_{eq(h)}$                       | No                                                         |
| Truck Loading and Unloading Activities (70<br>dBA to 80 dBA $L_{max}$ as measured at 50 feet)                                                                             | 145                                                                             | 65 dBA $L_{eq(h)}$                                                   | 65 dBA $L_{eq(h)}$                       | No                                                         |
| Mechanical Ventilation Equipment<br>(60 dBA $L_{eq}$ at a distance of 25 feet)                                                                                            | 100                                                                             | 48 dBA $L_{eq}$                                                      | 65 dBA $L_{eq(h)}$                       | No                                                         |
| Notes:<br>dBA = A-weighted decibel<br>$L_{eq}$ = equivalent continuous sound level<br>$L_{max}$ = maximum noise/sound level<br>Sources: FirstCarbon Solutions (FCS) 2022. |                                                                                 |                                                                      |                                          |                                                            |

These findings are consistent with the findings of the 2013 General Plan Update EIR which identified that noise increase impacts from additional development of residential and mixed-use development would be reduced to less than significant with the continued implementation of the City's Municipal Code.

### Construction Noise Reduction Condition of Approval

Project construction activity noise impacts, which could result in a temporary increase in ambient noise levels in the project vicinity that could result in annoyance or sleep disturbance of nearby sensitive receptors, would be reduced to a less than significant level with implementation of the following multi-part condition of approval.

- COA** Implementation of the following multi-part condition of approval is required to reduce potential construction period noise impacts:
- The construction contractor shall ensure that all equipment driven by internal combustion engines shall be equipped with mufflers, which are in good condition and appropriate for the equipment.
  - The construction contractor shall ensure that unnecessary idling of internal combustion engines (i.e., idling in excess of 5 minutes) is prohibited.
  - The construction contractor shall utilize “quiet” models of air compressors and other stationary noise sources where technology exists.
  - At all times during project grading and construction, the construction contractor shall ensure that stationary noise-generating equipment shall be located as far as practicable from sensitive receptors and placed so that emitted noise is directed away from adjacent residences.
  - The construction contractor shall ensure that the construction staging areas shall be located to create the greatest feasible distance between the staging area and noise-sensitive receptors nearest the project site.

- The construction contractor shall ensure that all on-site construction activities, including the operation of any tools or equipment used in construction, drilling, repair, alteration, grading or demolition work, are limited to between the hours of 7:00 a.m. and 7:00 p.m. Monday through Saturday, Saturday; with no such activity permitted on Sundays or Federal holidays.

### 5.2.2 - Groundborne Vibration/Noise Levels

This section analyzes both construction and operational groundborne vibration and noise impacts. Groundborne vibrations consist of rapidly fluctuating motions within the ground that have an average motion of zero. Vibrating objects in contact with the ground radiate vibration waves through various soil and rock strata to the foundations of nearby buildings. Groundborne noise is generated when vibrating building components radiate sound, or noise generated by groundborne vibration. In general, if groundborne vibration levels do not exceed levels considered to be perceptible, then groundborne noise levels would not be perceptible in most interior environments. Therefore, this analysis focuses on determining exceedances of groundborne vibration levels.

The City's Municipal Code regulates vibration by restricting a project's operations so as not to generate ground vibration by equipment (other than motor vehicles, trains or by temporary construction or demolition) which is perceptible without instruments by the average person at or beyond any lot line of the lot containing the activities. The FTA establishes thresholds for construction vibration impacts for various structural categories as shown in Table 5. As neither the Municipal Code nor the General Plan provide vibration standards for mobile operational activities, the Caltrans threshold for perception for transient sources of 0.04 inch per second (in/sec) PPV is used in this analysis.

#### Short-term Construction Vibration Impacts

A significant impact would occur if construction activities would result in vibration that produces a particle velocity greater than or equal to 0.2 in/sec PPV measured at the nearest structure.

Of the variety of equipment used during construction, the large vibratory rollers that could be used in the site preparation phase of construction would produce the greatest groundborne vibration levels. As shown in Table 3, large vibratory rollers produce groundborne vibration levels ranging up to 0.210 in/sec PPV at 25 feet from the operating equipment.

The closest off-site structure to the project boundaries is the single-family residence on Agua Mansa Road, located approximately 80 feet east of where heavy construction equipment would operate during construction. At this distance, groundborne vibration levels would range up to 0.035 in/sec PPV from operation of the types of equipment that would produce the highest vibration levels. This vibration level is well below the vibration threshold of 0.2 in/sec PPV as measured at the nearest structure. Therefore, the impact of short-term groundborne vibration associated with construction to off-site receptors would be less than significant.

## Operational Vibration Impacts

A significant impact would occur if project operations would generate groundborne vibration which is perceptible without instruments by the average person at or beyond any lot line of the lot containing the activities.

Implementation of the proposed project would not include any permanent stationary sources that would expose persons in the project vicinity to groundborne vibration levels that could be perceptible without instruments at or beyond the lot line. The proposed project would result in tractor-trailer truck deliveries to the project site. Tractor-trailer trucks would travel to the site via La Cadena Drive and access the site via Barton Road and De Berry Street.

It should be noted that according to the FTA Transit Noise and Vibration Impact Assessment Manual,<sup>9</sup> it is unusual for vibration from sources such as trucks traveling on paved roadways to be perceptible, even for receptors located close to major roadways. However, the following quantitative calculation is provided for a conservative analysis.

As shown in Table 3, a loaded truck operating off-road would produce a worst-case vibration level of 0.076 in/sec PPV at 25 feet, which is based on loaded trucks driving on rough roads or rough off-road conditions. The closest receptors along access roadways to the project site are located over 60 feet from the centerline of the nearest travel lane. Based on typical vibration propagation, this would result in a vibration level of 0.02 in/sec PPV at the nearest receptor. As noted previously, all nearby roads and on-site circulation areas are and would be paved, which would result in even lower vibration levels than this worst-case calculation. Therefore, worst-case vibration level from trucks traveling to and within the project site would not exceed the 0.04 in/sec PPV threshold of perception for transient sources as measured at the closest receptors in the project vicinity. Therefore, project operational groundborne vibration level impacts would be considered less than significant.

These findings are consistent with the findings of the 2013 General Plan Update EIR which identified implementation of the GPU would result in less than significant impacts for groundborne vibration or groundborne noise levels.

### 5.2.3 - Excessive Noise Levels from Airport Activity

A significant impact would occur if the proposed project would expose people residing or working in the project area to excessive noise levels for a project located within the vicinity of a private airstrip or an airport land use plan or, where such a plan has not been adopted, within 2 miles of a public airport or public use airport.

The project site is not located within the vicinity of a private airstrip. The nearest public airports to the project site are the Flabob Airport, located approximately 5.3 miles southwest of the project site, and the San Bernardino International Airport, located approximately 6.2 miles northeast of the project site. Because of the distance of the project site from the airport runways, the project site is located outside of the 65 dBA CNEL airport noise contours. While aircraft noise is occasionally audible on the project site from aircraft flyovers, aircraft noise associated with nearby airport activity

<sup>9</sup> Federal Transit Administration (FTA). 2018. Transit Noise and Vibration Impact Assessment Manual. September.

would not expose people residing or working near the project site to excessive noise levels. Therefore, implementation of the proposed project would not expose persons residing or working in the project vicinity to noise levels from airport activity that would be in excess of normally acceptable standards for the proposed land use development, and no impact would occur.

These findings are consistent with the findings of the 2013 General Plan Update EIR which identified implementation of the GPU would not expose people residing or working within two miles of any public airport nor private airport to excessive noise levels associated with air traffic.

THIS PAGE INTENTIONALLY LEFT BLANK

Appendix A:  
Noise Modeling and Measurement Data

THIS PAGE INTENTIONALLY LEFT BLANK

Project Number: 0237.0034

Sheet 1 of 1

Project Name: Agua Mansa Road

Test Personnel: Kevin Bolland

## Noise Measurement Survey

Site Number: ST-1 Date: March 4, 2021 Time: From 1041 To 1056

Site Location:

Half way between power pole BFO1258 and 4923425 E on the North side of Agua Mansa Road.

Primary Noise Sources: Traffic from Trucks and other Vehicles

## Measurement Results

|      | dBA  |
|------|------|
| Leq  | 72.6 |
| Lmax | 86.6 |
| Lmin | 42.6 |
| L5   | 78.4 |
| L10  | 76.5 |
| L50  | 69.0 |
| L90  | 50.8 |
| Ldn  |      |
| CNEL |      |

## Observed Noise Sources/Events

| Time | Noise Source/Event | dBA  |
|------|--------------------|------|
| 1042 | Passing Traffic    | 81.3 |
| 1044 | Passing cars       | 76.5 |
| 1047 | Multiple vehicles  | 79.4 |
| 1048 | Multiple Trucks    | 80.1 |
| 1050 | Large Trucks       | 85.1 |
| 1053 | Multiple Vehicles  | 81.0 |
|      |                    |      |
|      |                    |      |
|      |                    |      |

Comments: More traffic than expected

Data Lxt Data 457

Equipment: LXT

Settings: A-Weighted ☐ Other ☐

Measured Difference: 0.05 dBA

Slow ☒ Fast ☐Windscreen ☒

## Atmospheric Conditions:

| Maximum Wind Velocity (mph)    | Average Wind Velocity (mph) | Temperature (F) | Relative Humidity (%) |
|--------------------------------|-----------------------------|-----------------|-----------------------|
| 7 mph                          | 3 mph                       | 58              |                       |
|                                |                             |                 |                       |
| Comments: light variable winds |                             |                 |                       |

|                                                  |                       |                  |                    |      |                  |                      |                    |
|--------------------------------------------------|-----------------------|------------------|--------------------|------|------------------|----------------------|--------------------|
| Summary                                          |                       |                  |                    |      |                  |                      |                    |
| Filename                                         | LxT_Data.457          |                  |                    |      |                  |                      |                    |
| Serial Number                                    | 4228                  |                  |                    |      |                  |                      |                    |
| Model                                            | SoundTrack LxT®       |                  |                    |      |                  |                      |                    |
| Firmware Version                                 | 2.206                 |                  |                    |      |                  |                      |                    |
| User                                             |                       |                  |                    |      |                  |                      |                    |
| Location                                         |                       |                  |                    |      |                  |                      |                    |
| Job Description                                  |                       |                  |                    |      |                  |                      |                    |
| Note                                             |                       |                  |                    |      |                  |                      |                    |
| Measurement Description                          |                       |                  |                    |      |                  |                      |                    |
| Start                                            | 03/04/2021 10:41:39 * |                  |                    |      |                  |                      |                    |
| Stop                                             | 03/04/2021 10:56:17 * |                  |                    |      |                  |                      |                    |
| Duration                                         | 0:15:37.6             |                  |                    |      |                  |                      |                    |
| Run Time                                         | 0:15:37.6             |                  |                    |      |                  |                      |                    |
| Pause                                            | 0:00:00.0             |                  |                    |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Pre Calibration                                  | 03/04/2021 13:14:12   |                  |                    |      |                  |                      |                    |
| Post Calibration                                 | None                  |                  |                    |      |                  |                      |                    |
| Calibration Deviation                            | ---                   |                  |                    |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Overall Settings                                 |                       |                  |                    |      |                  |                      |                    |
| RMS Weight                                       | A Weighting           |                  |                    |      |                  |                      |                    |
| Peak Weight                                      | A Weighting           |                  |                    |      |                  |                      |                    |
| Detector                                         | Slow                  |                  |                    |      |                  |                      |                    |
| Preamp                                           | PRMLxT2L              |                  |                    |      |                  |                      |                    |
| Microphone Correction                            | Off                   |                  |                    |      |                  |                      |                    |
| Integration Method                               | Exponential           |                  |                    |      |                  |                      |                    |
| Overload                                         | 124.7 dB              |                  |                    |      |                  |                      |                    |
|                                                  | A                     | C                | Z                  |      |                  |                      |                    |
| Under Range Peak                                 | 80.9                  | 77.9             | 82.9 dB            |      |                  |                      |                    |
| Under Range Limit                                | 27.1                  | 27.1             | 31.8 dB            |      |                  |                      |                    |
| Noise Floor                                      | 18.0                  | 18.0             | 22.6 dB            |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Results                                          |                       |                  |                    |      |                  |                      |                    |
| LASeq                                            | 72.6 dB               |                  |                    |      |                  |                      |                    |
| LASE                                             | 102.3 dB              |                  |                    |      |                  |                      |                    |
| EAS                                              | 1.875 mPa²h           |                  |                    |      |                  |                      |                    |
| EAS8                                             | 57.585 mPa²h          |                  |                    |      |                  |                      |                    |
| EAS40                                            | 287.927 mPa²h         |                  |                    |      |                  |                      |                    |
| LApeak (max)                                     | 03/04/2021 10:43:37   | 101.8 dB         | *                  |      |                  |                      |                    |
| LASmax                                           | 03/04/2021 10:49:11   | 86.6 dB          | *                  |      |                  |                      |                    |
| LASmin                                           | 03/04/2021 10:44:32   | 42.6 dB          | *                  |      |                  |                      |                    |
| SEA                                              | -99.9 dB              |                  |                    |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| LAS > 85.0 dB (Exceedence Counts / Duration)     | 2                     | 2.9 s            |                    |      |                  |                      |                    |
| LAS > 115.0 dB (Exceedence Counts / Duration)    | 0                     | 0.0 s            |                    |      |                  |                      |                    |
| LApeak > 135.0 dB (Exceedence Counts / Duration) | 0                     | 0.0 s            |                    |      |                  |                      |                    |
| LApeak > 137.0 dB (Exceedence Counts / Duration) | 0                     | 0.0 s            |                    |      |                  |                      |                    |
| LApeak > 140.0 dB (Exceedence Counts / Duration) | 0                     | 0.0 s            |                    |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Community Noise                                  | Ldn                   | LDay 07:00-23:00 | LNight 23:00-07:00 | Lden | LDay 07:00-19:00 | LEvening 19:00-23:00 | LNight 23:00-07:00 |
|                                                  | 72.6                  | 72.6             | -99.9              | 72.6 | 72.6             | -99.9                | -99.9              |
| LCSeq                                            | 78.1 dB               |                  |                    |      |                  |                      |                    |
| LASeq                                            | 72.6 dB               |                  |                    |      |                  |                      |                    |
| LCSeq - LASeq                                    | 5.6 dB                |                  |                    |      |                  |                      |                    |
| LALeq                                            | 75.3 dB               |                  |                    |      |                  |                      |                    |
| LAeq                                             | 72.6 dB               |                  |                    |      |                  |                      |                    |
| LALeq - LAeq                                     | 2.7 dB                |                  |                    |      |                  |                      |                    |
| # Overloads                                      | 0                     |                  |                    |      |                  |                      |                    |
| Overload Duration                                | 0.0 s                 |                  |                    |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Dose Settings                                    |                       |                  |                    |      |                  |                      |                    |
| Dose Name                                        | OSHA-1                |                  | OSHA-2             |      |                  |                      |                    |
| Exch. Rate                                       | 5                     |                  | 5 dB               |      |                  |                      |                    |
| Threshold                                        | 90                    |                  | 80 dB              |      |                  |                      |                    |
| Criterion Level                                  | 90                    |                  | 90 dB              |      |                  |                      |                    |
| Criterion Duration                               | 8                     |                  | 8 h                |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Results                                          |                       |                  |                    |      |                  |                      |                    |
| Dose                                             | -99.9                 |                  | 0.03 %             |      |                  |                      |                    |
| Projected Dose                                   | -99.9                 |                  | 0.78 %             |      |                  |                      |                    |
| TWA (Projected)                                  | -99.9                 |                  | 55.0 dB            |      |                  |                      |                    |
| TWA (t)                                          | -99.9                 |                  | 30.3 dB            |      |                  |                      |                    |
| Lep (t)                                          | 57.7                  |                  | 57.7 dB            |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Statistics                                       |                       |                  |                    |      |                  |                      |                    |
| LAS5.00                                          | 78.4 dB               |                  |                    |      |                  |                      |                    |
| LAS10.00                                         | 76.5 dB               |                  |                    |      |                  |                      |                    |
| LAS33.30                                         | 72.2 dB               |                  |                    |      |                  |                      |                    |
| LAS50.00                                         | 69.0 dB               |                  |                    |      |                  |                      |                    |
| LAS66.60                                         | 62.9 dB               |                  |                    |      |                  |                      |                    |
| LAS90.00                                         | 50.8 dB               |                  |                    |      |                  |                      |                    |

Note: \*Indicates that the date/time was adjusted/corrected on the SLM after the measurement was taken to match the correct date/time.

Project Number: ~~00~~ 0237.0034  
Project Name: Agua Mansa Road  
Test Personnel: Kevin Bolland

Sheet 2 of     

### Noise Measurement Survey

Site Number: ST-2 Date: March 4, 2021 Time: From 1100 To     

Site Location:

outside an apparently abandoned driveway on the North  
side of Agua Mansa Road.

Primary Noise Sources: Traffic from passing vehicles

#### Measurement Results

|      | dBA  |
|------|------|
| Leq  |      |
| Lmax | 88.8 |
| Lmin | 40.9 |
| L5   | 78.5 |
| L10  | 76.7 |
| L50  | 60.7 |
| L90  | 44.5 |
| Ldn  |      |
| CNEL |      |

#### Observed Noise Sources/Events

| Time | Noise Source/Event | dBA  |
|------|--------------------|------|
| 1100 | Traffic            | 77.0 |
| 1105 | Traffic            | 79.2 |
| 1108 | Traffic            | 74.6 |
| 1109 | Traffic            | 80.6 |
| 1110 | Traffic            | 76.0 |
| 1111 | Traffic            | 76.5 |
| 1112 | Truck              | 82.9 |
| 1113 | Multiple Trucks    | 85.4 |
|      |                    |      |

Comments: Lxf Data, 458

Equipment: LXT  
Settings: A-Weighted ☐ Other ☐

Measured Difference: -0.02 dBA  
Slow ☒ Fast ☐ Windscreen ☒

#### Atmospheric Conditions:

| Maximum Wind Velocity (mph) | Average Wind Velocity (mph) | Temperature (F) | Relative Humidity (%) |
|-----------------------------|-----------------------------|-----------------|-----------------------|
| 7 mph                       | 3 mph                       | 58              |                       |
|                             |                             |                 |                       |
| Comments:                   |                             |                 |                       |

|                                                  |                       |                  |                    |                                                               |  |
|--------------------------------------------------|-----------------------|------------------|--------------------|---------------------------------------------------------------|--|
| Summary                                          |                       |                  |                    |                                                               |  |
| Filename                                         | LxT_Data.458          |                  |                    |                                                               |  |
| Serial Number                                    | 4228                  |                  |                    |                                                               |  |
| Model                                            | SoundTrack LxT®       |                  |                    |                                                               |  |
| Firmware Version                                 | 2.206                 |                  |                    |                                                               |  |
| User                                             |                       |                  |                    |                                                               |  |
| Location                                         |                       |                  |                    |                                                               |  |
| Job Description                                  |                       |                  |                    |                                                               |  |
| Note                                             |                       |                  |                    |                                                               |  |
| Measurement Description                          |                       |                  |                    |                                                               |  |
| Start                                            | 03/04/2021 11:00:39 * |                  |                    |                                                               |  |
| Stop                                             | 03/04/2021 11:16:02 * |                  |                    |                                                               |  |
| Duration                                         | 0:15:22.4             |                  |                    |                                                               |  |
| Run Time                                         | 0:15:22.4             |                  |                    |                                                               |  |
| Pause                                            | 0:00:00.0             |                  |                    |                                                               |  |
|                                                  |                       |                  |                    |                                                               |  |
| Pre Calibration                                  | 03/03/2021 13:36:16   |                  |                    |                                                               |  |
| Post Calibration                                 | None                  |                  |                    |                                                               |  |
| Calibration Deviation                            | ---                   |                  |                    |                                                               |  |
|                                                  |                       |                  |                    |                                                               |  |
| Overall Settings                                 |                       |                  |                    |                                                               |  |
| RMS Weight                                       | A Weighting           |                  |                    |                                                               |  |
| Peak Weight                                      | A Weighting           |                  |                    |                                                               |  |
| Detector                                         | Slow                  |                  |                    |                                                               |  |
| Preamp                                           | PRMLxT2L              |                  |                    |                                                               |  |
| Microphone Correction                            | Off                   |                  |                    |                                                               |  |
| Integration Method                               | Exponential           |                  |                    |                                                               |  |
| Overload                                         | 124.7 dB              |                  |                    |                                                               |  |
|                                                  | A                     | C                | Z                  |                                                               |  |
| Under Range Peak                                 | 80.9                  | 77.9             | 82.9 dB            |                                                               |  |
| Under Range Limit                                | 27.1                  | 27.1             | 31.8 dB            |                                                               |  |
| Noise Floor                                      | 18.0                  | 18.0             | 22.6 dB            |                                                               |  |
|                                                  |                       |                  |                    |                                                               |  |
| Results                                          |                       |                  |                    |                                                               |  |
| LASeq                                            | 72.1                  | dB               |                    |                                                               |  |
| LASE                                             | 101.8                 | dB               |                    |                                                               |  |
| EAS                                              | 1.665                 | mPa²h            |                    |                                                               |  |
| EAS8                                             | 52.000                | mPa²h            |                    |                                                               |  |
| EAS40                                            | 260.002               | mPa²h            |                    |                                                               |  |
| LAPeak (max)                                     | 03/04/2021 11:06:01   | 103.5            | dB *               |                                                               |  |
| LASmax                                           | 03/03/2021 11:06:06   | 88.8             | dB *               |                                                               |  |
| LASmin                                           | 03/04/2021 11:08:20   | 40.9             | dB *               |                                                               |  |
| SEA                                              | -99.9                 | dB               |                    |                                                               |  |
|                                                  |                       |                  |                    |                                                               |  |
| LAS > 85.0 dB (Exceedence Counts / Duration)     | 2                     | 3.5              | s                  |                                                               |  |
| LAS > 115.0 dB (Exceedence Counts / Duration)    | 0                     | 0.0              | s                  |                                                               |  |
| LAPeak > 135.0 dB (Exceedence Counts / Duration) | 0                     | 0.0              | s                  |                                                               |  |
| LAPeak > 137.0 dB (Exceedence Counts / Duration) | 0                     | 0.0              | s                  |                                                               |  |
| LAPeak > 140.0 dB (Exceedence Counts / Duration) | 0                     | 0.0              | s                  |                                                               |  |
|                                                  |                       |                  |                    |                                                               |  |
| Community Noise                                  | Ldn                   | LDay 07:00-23:00 | LNight 23:00-07:00 | Lden LDay 07:00-19:00 LEvening 19:00-23:00 LNight 23:00-07:00 |  |
|                                                  | 72.1                  | 72.1             | -99.9              | 72.1 72.1 -99.9 -99.9                                         |  |
| LCSeq                                            | 79.0                  | dB               |                    |                                                               |  |
| LASeq                                            | 72.1                  | dB               |                    |                                                               |  |
| LCSeq - LASeq                                    | 6.9                   | dB               |                    |                                                               |  |
| LALeq                                            | 74.9                  | dB               |                    |                                                               |  |
| LAeq                                             | 72.1                  | dB               |                    |                                                               |  |
| LALeq - LAeq                                     | 2.8                   | dB               |                    |                                                               |  |
| # Overloads                                      | 0                     |                  |                    |                                                               |  |
| Overload Duration                                | 0.0                   | s                |                    |                                                               |  |
|                                                  |                       |                  |                    |                                                               |  |
| Dose Settings                                    |                       |                  |                    |                                                               |  |
| Dose Name                                        | OSHA-1                | OSHA-2           |                    |                                                               |  |
| Exch. Rate                                       | 5                     | 5 dB             |                    |                                                               |  |
| Threshold                                        | 90                    | 80 dB            |                    |                                                               |  |
| Criterion Level                                  | 90                    | 90 dB            |                    |                                                               |  |
| Criterion Duration                               | 8                     | 8 h              |                    |                                                               |  |
|                                                  |                       |                  |                    |                                                               |  |
| Results                                          |                       |                  |                    |                                                               |  |
| Dose                                             | -99.9                 | 0.03 %           |                    |                                                               |  |
| Projected Dose                                   | -99.9                 | 0.90 %           |                    |                                                               |  |
| TWA (Projected)                                  | -99.9                 | 56.1 dB          |                    |                                                               |  |
| TWA (t)                                          | -99.9                 | 31.2 dB          |                    |                                                               |  |
| Lep (t)                                          | 57.2                  | 57.2 dB          |                    |                                                               |  |
|                                                  |                       |                  |                    |                                                               |  |
| Statistics                                       |                       |                  |                    |                                                               |  |
| LAS5.00                                          | 78.5                  | dB               |                    |                                                               |  |
| LAS10.00                                         | 76.7                  | dB               |                    |                                                               |  |
| LAS33.30                                         | 69.4                  | dB               |                    |                                                               |  |
| LAS50.00                                         | 60.7                  | dB               |                    |                                                               |  |
| LAS66.60                                         | 52.5                  | dB               |                    |                                                               |  |
| LAS90.00                                         | 44.5                  | dB               |                    |                                                               |  |

Note: \*Indicates that the date/time was adjusted/corrected on the SLM after the measurement was taken to match the correct date/time.

Project Number: 0237.0034  
Project Name: Agua Mansa Road  
Test Personnel: Kevin Bolland

Sheet 3 of

### Noise Measurement Survey

Site Number: ST-3 Date: March 4, 2021 Time: From 1122 To

Site Location: Adjacent to Power pole # 202771S, approximately 10 feet North of Agua Mansa Road

Primary Noise Sources: Traffic And operations at nearby construction site; east of project site.  
Lxt - Data. 459

#### Measurement Results

|      | dBA  |
|------|------|
| Leq  | 70.9 |
| Lmax | 85.8 |
| Lmin | 41.6 |
| L5   | 78.0 |
| L10  | 75.9 |
| L50  | 58.3 |
| L90  | 44.3 |
| Ldn  |      |
| CNEL |      |

#### Observed Noise Sources/Events

| Time | Noise Source/Event | dBA  |
|------|--------------------|------|
| 1122 | Trucks             | 81.2 |
| 1125 | Vehicles           | 78.3 |
| 1128 | Truck              | 82.4 |
| 1130 | Trucks             | 81.5 |
| 1132 | Trucks             | 82.1 |
|      |                    |      |
|      |                    |      |
|      |                    |      |
|      |                    |      |

Comments: minimal other noise

Lxt - Data. 459

Equipment: LXT  
Settings: A-Weighted ☒ Other ☐

Measured Difference: -0.08 dBA  
Slow ☒ Fast ☐ Windscreen ☒

#### Atmospheric Conditions:

| Maximum Wind Velocity (mph) | Average Wind Velocity (mph) | Temperature (F) | Relative Humidity (%) |  |
|-----------------------------|-----------------------------|-----------------|-----------------------|--|
| 7 mph                       | 3 mph                       | 58              |                       |  |
|                             |                             |                 |                       |  |
| Comments:                   |                             |                 |                       |  |

|                                                  |                       |                  |                    |      |                  |                      |                    |
|--------------------------------------------------|-----------------------|------------------|--------------------|------|------------------|----------------------|--------------------|
| Summary                                          |                       |                  |                    |      |                  |                      |                    |
| Filename                                         | LxT_Data.459          |                  |                    |      |                  |                      |                    |
| Serial Number                                    | 4228                  |                  |                    |      |                  |                      |                    |
| Model                                            | SoundTrack LxT®       |                  |                    |      |                  |                      |                    |
| Firmware Version                                 | 2.206                 |                  |                    |      |                  |                      |                    |
| User                                             |                       |                  |                    |      |                  |                      |                    |
| Location                                         |                       |                  |                    |      |                  |                      |                    |
| Job Description                                  |                       |                  |                    |      |                  |                      |                    |
| Note                                             |                       |                  |                    |      |                  |                      |                    |
| Measurement Description                          |                       |                  |                    |      |                  |                      |                    |
| Start                                            | 03/04/2021 11:22:59 * |                  |                    |      |                  |                      |                    |
| Stop                                             | 03/04/2021 11:37:13 * |                  |                    |      |                  |                      |                    |
| Duration                                         | 0:15:14.0             |                  |                    |      |                  |                      |                    |
| Run Time                                         | 0:15:14.0             |                  |                    |      |                  |                      |                    |
| Pause                                            | 0:00:00.0             |                  |                    |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Pre Calibration                                  | 03/03/2021 13:57:45   |                  |                    |      |                  |                      |                    |
| Post Calibration                                 | None                  |                  |                    |      |                  |                      |                    |
| Calibration Deviation                            | ---                   |                  |                    |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Overall Settings                                 |                       |                  |                    |      |                  |                      |                    |
| RMS Weight                                       | A Weighting           |                  |                    |      |                  |                      |                    |
| Peak Weight                                      | A Weighting           |                  |                    |      |                  |                      |                    |
| Detector                                         | Slow                  |                  |                    |      |                  |                      |                    |
| Preamp                                           | PRMLxT2L              |                  |                    |      |                  |                      |                    |
| Microphone Correction                            | Off                   |                  |                    |      |                  |                      |                    |
| Integration Method                               | Exponential           |                  |                    |      |                  |                      |                    |
| Overload                                         | 124.8 dB              |                  |                    |      |                  |                      |                    |
|                                                  | A                     | C                | Z                  |      |                  |                      |                    |
| Under Range Peak                                 | 81.0                  | 78.0             | 83.0 dB            |      |                  |                      |                    |
| Under Range Limit                                | 27.1                  | 27.1             | 31.8 dB            |      |                  |                      |                    |
| Noise Floor                                      | 18.0                  | 18.0             | 22.7 dB            |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Results                                          |                       |                  |                    |      |                  |                      |                    |
| LASeq                                            | 70.9                  | dB               |                    |      |                  |                      |                    |
| LASE                                             | 100.5                 | dB               |                    |      |                  |                      |                    |
| EAS                                              | 1.242                 | mPa²h            |                    |      |                  |                      |                    |
| EAS8                                             | 39.129                | mPa²h            |                    |      |                  |                      |                    |
| EAS40                                            | 195.645               | mPa²h            |                    |      |                  |                      |                    |
| LApeak (max)                                     | 03/04/2021 11:26:16   | 100.4            | dB *               |      |                  |                      |                    |
| LASmax                                           | 03/04/2021 11:26:16   | 85.8             | dB *               |      |                  |                      |                    |
| LASmin                                           | 03/04/2021 11:26:54   | 41.6             | dB *               |      |                  |                      |                    |
| SEA                                              | -99.9 dB              |                  |                    |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| LAS > 85.0 dB (Exceedence Counts / Duration)     | 1                     | 1.4              | s                  |      |                  |                      |                    |
| LAS > 115.0 dB (Exceedence Counts / Duration)    | 0                     | 0.0              | s                  |      |                  |                      |                    |
| LApeak > 135.0 dB (Exceedence Counts / Duration) | 0                     | 0.0              | s                  |      |                  |                      |                    |
| LApeak > 137.0 dB (Exceedence Counts / Duration) | 0                     | 0.0              | s                  |      |                  |                      |                    |
| LApeak > 140.0 dB (Exceedence Counts / Duration) | 0                     | 0.0              | s                  |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Community Noise                                  | Ldn                   | LDay 07:00-23:00 | LNight 23:00-07:00 | Lden | LDay 07:00-19:00 | LEvening 19:00-23:00 | LNight 23:00-07:00 |
|                                                  | 70.9                  | 70.9             | -99.9              | 70.9 | 70.9             | -99.9                | -99.9              |
| LCSeq                                            | 77.0 dB               |                  |                    |      |                  |                      |                    |
| LASeq                                            | 70.9 dB               |                  |                    |      |                  |                      |                    |
| LCSeq - LASeq                                    | 6.1 dB                |                  |                    |      |                  |                      |                    |
| LALeq                                            | 73.5 dB               |                  |                    |      |                  |                      |                    |
| LALeq                                            | 70.9 dB               |                  |                    |      |                  |                      |                    |
| LALeq - LALeq                                    | 2.7 dB                |                  |                    |      |                  |                      |                    |
| # Overloads                                      | 0                     |                  |                    |      |                  |                      |                    |
| Overload Duration                                | 0.0 s                 |                  |                    |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Dose Settings                                    |                       |                  |                    |      |                  |                      |                    |
| Dose Name                                        | OSHA-1                |                  | OSHA-2             |      |                  |                      |                    |
| Exch. Rate                                       | 5                     |                  | 5 dB               |      |                  |                      |                    |
| Threshold                                        | 90                    |                  | 80 dB              |      |                  |                      |                    |
| Criterion Level                                  | 90                    |                  | 90 dB              |      |                  |                      |                    |
| Criterion Duration                               | 8                     |                  | 8 h                |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Results                                          |                       |                  |                    |      |                  |                      |                    |
| Dose                                             | -99.9                 |                  | 0.02 %             |      |                  |                      |                    |
| Projected Dose                                   | -99.9                 |                  | 0.74 %             |      |                  |                      |                    |
| TWA (Projected)                                  | -99.9                 |                  | 54.6 dB            |      |                  |                      |                    |
| TWA (t)                                          | -99.9                 |                  | 29.8 dB            |      |                  |                      |                    |
| Lep (t)                                          | 55.9                  |                  | 55.9 dB            |      |                  |                      |                    |
|                                                  |                       |                  |                    |      |                  |                      |                    |
| Statistics                                       |                       |                  |                    |      |                  |                      |                    |
| LAS5.00                                          | 78.0 dB               |                  |                    |      |                  |                      |                    |
| LAS10.00                                         | 75.9 dB               |                  |                    |      |                  |                      |                    |
| LAS33.30                                         | 66.4 dB               |                  |                    |      |                  |                      |                    |
| LAS50.00                                         | 58.3 dB               |                  |                    |      |                  |                      |                    |
| LAS66.60                                         | 50.1 dB               |                  |                    |      |                  |                      |                    |
| LAS90.00                                         | 44.3 dB               |                  |                    |      |                  |                      |                    |

Note: \*Indicates that the date/time was adjusted/corrected on the SLM after the measurement was taken to match the correct date/time.

Project Number: 0237.0034  
Project Name: Agua Mansa Road  
Test Personnel: Kevin Bolland

Sheet 4 of

### Noise Measurement Survey

Site Number: LT-1 Date: March 4-5, 2021 Time: From 1154 AM To

Site Location:  
At the Base of power pole on North side of  
Agua Mansa Road Adjacent to Abandoned Driveway.

Primary Noise Sources: Traffic

#### Measurement Results

|      | dBA  |
|------|------|
| Leq  | 71.3 |
| Lmax | 95.5 |
| Lmin | 35.9 |
| L5   | 78.2 |
| L10  | 76.2 |
| L50  | 57.8 |
| L90  | 46.6 |
| Ldn  |      |
| CNEL |      |

#### Observed Noise Sources/Events

| Time | Noise Source/Event | dBA |
|------|--------------------|-----|
|      |                    |     |
|      |                    |     |
|      |                    |     |
|      |                    |     |
|      |                    |     |
|      |                    |     |
|      |                    |     |
|      |                    |     |
|      |                    |     |

Comments: Cxf Data. 460

Equipment: Settings: A-Weighted ☐ Other ☐

Measured Difference: 0.00 dBA  
Slow ☒ Fast ☐ Windscreen ☒

#### Atmospheric Conditions:

| Maximum Wind Velocity (mph) | Average Wind Velocity (mph) | Temperature (F) | Relative Humidity (%) |  |
|-----------------------------|-----------------------------|-----------------|-----------------------|--|
|                             |                             |                 |                       |  |
|                             |                             |                 |                       |  |
| Comments:                   |                             |                 |                       |  |

|                                                  |                       |                  |                    |      |
|--------------------------------------------------|-----------------------|------------------|--------------------|------|
| Summary                                          |                       |                  |                    |      |
| Filename                                         | LxT_Data.460          |                  |                    |      |
| Serial Number                                    | 4228                  |                  |                    |      |
| Model                                            | SoundTrack LxT®       |                  |                    |      |
| Firmware Version                                 | 2.206                 |                  |                    |      |
| User                                             |                       |                  |                    |      |
| Location                                         |                       |                  |                    |      |
| Job Description                                  |                       |                  |                    |      |
| Note                                             |                       |                  |                    |      |
| Measurement Description                          |                       |                  |                    |      |
| Start                                            | 03/04/2021 11:54:51 * |                  |                    |      |
| Stop                                             | 03/05/2021 13:12:26 * |                  |                    |      |
| Duration                                         | 1 Day 01:17:35.3      |                  |                    |      |
| Run Time                                         | 1 Day 01:17:35.3      |                  |                    |      |
| Pause                                            | 0:00:00.0             |                  |                    |      |
|                                                  |                       |                  |                    |      |
| Pre Calibration                                  | 03/03/2021 14:26:33   |                  |                    |      |
| Post Calibration                                 | None                  |                  |                    |      |
| Calibration Deviation                            | ---                   |                  |                    |      |
|                                                  |                       |                  |                    |      |
| Overall Settings                                 |                       |                  |                    |      |
| RMS Weight                                       | A Weighting           |                  |                    |      |
| Peak Weight                                      | A Weighting           |                  |                    |      |
| Detector                                         | Slow                  |                  |                    |      |
| Preamp                                           | PRMLxT2L              |                  |                    |      |
| Microphone Correction                            | Off                   |                  |                    |      |
| Integration Method                               | Exponential           |                  |                    |      |
| Overload                                         | 124.9 dB              |                  |                    |      |
|                                                  | A                     | C                | Z                  |      |
| Under Range Peak                                 | 81.1                  | 78.1             | 83.1 dB            |      |
| Under Range Limit                                | 27.2                  | 27.2             | 31.9 dB            |      |
| Noise Floor                                      | 18.0                  | 18.0             | 22.7 dB            |      |
|                                                  |                       |                  |                    |      |
| Results                                          |                       |                  |                    |      |
| LASeq                                            | 71.3 dB               |                  |                    |      |
| LASE                                             | 120.9 dB              |                  |                    |      |
| EAS                                              | 136.960 mPa²h         |                  |                    |      |
| EAS8                                             | 43.319 mPa²h          |                  |                    |      |
| EAS40                                            | 216.597 mPa²h         |                  |                    |      |
| LApeak (max)                                     | 03/05/2021 5:57:53    | 120.6 dB         | *                  |      |
| LASmax                                           | 03/05/2021 1:03:43    | 95.5 dB          | *                  |      |
| LASmin                                           | 03/05/2021 12:56:39   | 35.9 dB          | *                  |      |
| SEA                                              | 133.6 dB              |                  |                    |      |
|                                                  |                       |                  |                    |      |
| LAS > 85.0 dB (Exceedence Counts / Duration)     | 147                   | 269.4 s          |                    |      |
| LAS > 115.0 dB (Exceedence Counts / Duration)    | 0                     | 0.0 s            |                    |      |
| LApeak > 135.0 dB (Exceedence Counts / Duration) | 0                     | 0.0 s            |                    |      |
| LApeak > 137.0 dB (Exceedence Counts / Duration) | 0                     | 0.0 s            |                    |      |
| LApeak > 140.0 dB (Exceedence Counts / Duration) | 0                     | 0.0 s            |                    |      |
|                                                  |                       |                  |                    |      |
| Community Noise                                  | Ldn                   | LDay 07:00-23:00 | LNight 23:00-07:00 | Lden |
|                                                  | 75.3                  | 72.2             | 68.4               | 75.9 |
| LCSeq                                            | 76.8 dB               |                  |                    |      |
| LASeq                                            | 71.3 dB               |                  |                    |      |
| LCSeq - LASeq                                    | 5.5 dB                |                  |                    |      |
| LALeq                                            | 73.8 dB               |                  |                    |      |
| LAEq                                             | 71.3 dB               |                  |                    |      |
| LALeq - LAeq                                     | 2.5 dB                |                  |                    |      |
| # Overloads                                      | 0                     |                  |                    |      |
| Overload Duration                                | 0.0 s                 |                  |                    |      |
|                                                  |                       |                  |                    |      |
| Dose Settings                                    |                       |                  |                    |      |
| Dose Name                                        | OSHA-1                | OSHA-2           |                    |      |
| Exch. Rate                                       | 5                     | 5 dB             |                    |      |
| Threshold                                        | 90                    | 80 dB            |                    |      |
| Criterion Level                                  | 90                    | 90 dB            |                    |      |
| Criterion Duration                               | 8                     | 8 h              |                    |      |
|                                                  |                       |                  |                    |      |
| Results                                          |                       |                  |                    |      |
| Dose                                             | 0.04                  | 2.55 %           |                    |      |
| Projected Dose                                   | 0.01                  | 0.81 %           |                    |      |
| TWA (Projected)                                  | 25.8                  | 55.2 dB          |                    |      |
| TWA (t)                                          | 34.1                  | 63.5 dB          |                    |      |
| Lep (t)                                          | 76.3                  | 76.3 dB          |                    |      |
|                                                  |                       |                  |                    |      |
| Statistics                                       |                       |                  |                    |      |
| LAS5.00                                          | 78.2 dB               |                  |                    |      |
| LAS10.00                                         | 76.2 dB               |                  |                    |      |
| LAS33.30                                         | 66.0 dB               |                  |                    |      |
| LAS50.00                                         | 57.8 dB               |                  |                    |      |
| LAS66.60                                         | 52.4 dB               |                  |                    |      |
| LAS90.00                                         | 46.6 dB               |                  |                    |      |

Note: \*Indicates that the date/time was adjusted/corrected on the SLM after the measurement was taken to match the correct date/time.

TABLE Existing (year 2021)-01  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - S. Rancho Avenue to Project Driveway 4

NOTES: Agua Mansa Logistics Center - Existing (year 2021)

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 9400      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 73.31

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 92.7                                            | 199.4   | 429.4   | 924.9   |

---

TABLE Existing (year 2021)-02  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 4 to Project Driveway  
3

NOTES: Agua Mansa Logistics Center - Existing (year 2021)

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 9400      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 73.31

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 92.7                                            | 199.4   | 429.4   | 924.9   |

TABLE Existing (year 2021)-03  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 3 to Project Driveway  
2

NOTES: Agua Mansa Logistics Center - Existing (year 2021)

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 9400      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 73.31

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 92.7                                            | 199.4   | 429.4   | 924.9   |

TABLE Existing (year 2021)-04  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 2 to Project Driveway  
1

NOTES: Agua Mansa Logistics Center - Existing (year 2021)

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 9400      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 73.31

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 92.7                                            | 199.4   | 429.4   | 924.9   |

TABLE Existing (year 2021)-05  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - west of Project Driveway 1

NOTES: Agua Mansa Logistics Center - Existing (year 2021)

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 9400      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    |                                  |         |       |
|          | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS |                                  |         |       |
|          | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS |                                  |         |       |
|          | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 73.31

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 92.7                                            | 199.4   | 429.4   | 924.9   |

---

TABLE Opening Year No Project-01  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - S. Rancho Avenue to Project Driveway 4

NOTES: Agua Mansa Logistics Center - Opening Year No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 12300      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    |                                  |         |       |
|          | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS |                                  |         |       |
|          | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS |                                  |         |       |
|          | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.48

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 110.9                                           | 238.5   | 513.7   | 1106.4  |

TABLE Opening Year No Project-02  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 4 to Project Driveway  
3

NOTES: Agua Mansa Logistics Center - Opening Year No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 12300      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.48

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 110.9                                           | 238.5   | 513.7   | 1106.4  |

TABLE Opening Year No Project-03  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 3 to Project Driveway  
2

NOTES: Agua Mansa Logistics Center - Opening Year No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 12300      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.48

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 110.9                                           | 238.5   | 513.7   | 1106.4  |

TABLE Opening Year No Project-04  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 2 to Project Driveway  
1

NOTES: Agua Mansa Logistics Center - Opening Year No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 12300      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.48

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 110.9                                           | 238.5   | 513.7   | 1106.4  |

TABLE Opening Year No Project-05  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - west of Project Driveway 1

NOTES: Agua Mansa Logistics Center - Opening Year No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 12300      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    |                                  |         |       |
|          | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS |                                  |         |       |
|          | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS |                                  |         |       |
|          | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.48

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 110.9                                           | 238.5   | 513.7   | 1106.4  |

TABLE Opening Year Plus Project-01  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - S. Rancho Avenue to Project Driveway 4

NOTES: Agua Mansa Logistics Center - Opening Year Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13900      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 75.01

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 120.3                                           | 258.8   | 557.3   | 1200.4  |

TABLE Opening Year Plus Project-02  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 4 to Project Driveway  
3

NOTES: Agua Mansa Logistics Center - Opening Year Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13500      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.88

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 117.9                                           | 253.8   | 546.6   | 1177.3  |

TABLE Opening Year Plus Project-03  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 3 to Project Driveway  
2

NOTES: Agua Mansa Logistics Center - Opening Year Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13000      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.72

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 115.0                                           | 247.5   | 533.0   | 1148.0  |

TABLE Opening Year Plus Project-04  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 2 to Project Driveway  
1

NOTES: Agua Mansa Logistics Center - Opening Year Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 12700      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.62

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 113.3                                           | 243.7   | 524.8   | 1130.3  |

TABLE Opening Year Plus Project-05  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - west of Project Driveway 1

NOTES: Agua Mansa Logistics Center - Opening Year Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 12700      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    |                                  |         |       |
|          | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS |                                  |         |       |
|          | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS |                                  |         |       |
|          | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.62

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 113.3                                           | 243.7   | 524.8   | 1130.3  |

TABLE Year 2040 No Project-01  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - S. Rancho Avenue to Project Driveway 4

NOTES: Agua Mansa Logistics Center - Year 2040 No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13000      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    |                                  |         |       |
|          | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS |                                  |         |       |
|          | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS |                                  |         |       |
|          | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.72

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 115.0                                           | 247.5   | 533.0   | 1148.0  |

---

TABLE Year 2040 No Project-02  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 4 to Project Driveway  
3

NOTES: Agua Mansa Logistics Center - Year 2040 No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13000      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.72

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 115.0                                           | 247.5   | 533.0   | 1148.0  |

TABLE Year 2040 No Project-03  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 3 to Project Driveway  
2

NOTES: Agua Mansa Logistics Center - Year 2040 No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13000      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.72

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 115.0                                           | 247.5   | 533.0   | 1148.0  |

TABLE Year 2040 No Project-04  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 2 to Project Driveway  
1

NOTES: Agua Mansa Logistics Center - Year 2040 No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13000      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.72

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 115.0                                           | 247.5   | 533.0   | 1148.0  |

TABLE Year 2040 No Project-05  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - west of Project Driveway 1

NOTES: Agua Mansa Logistics Center - Year 2040 No Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13000      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.72

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 115.0                                           | 247.5   | 533.0   | 1148.0  |

---

TABLE Year 2040 Plus Project-01  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - S. Rancho Avenue to Project Driveway 4

NOTES: Agua Mansa Logistics Center - Year 2040 Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 14600      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 75.22

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 124.3                                           | 267.4   | 575.9   | 1240.4  |

---

TABLE Year 2040 Plus Project-02  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 4 to Project Driveway  
3

NOTES: Agua Mansa Logistics Center - Year 2040 Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 14200      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 75.10

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 122.0                                           | 262.5   | 565.3   | 1217.6  |

TABLE Year 2040 Plus Project-03  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 3 to Project Driveway  
2

NOTES: Agua Mansa Logistics Center - Year 2040 Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13800      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.98

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 119.7                                           | 257.5   | 554.6   | 1194.6  |

TABLE Year 2040 Plus Project-04  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - Project Driveway 2 to Project Driveway  
1

NOTES: Agua Mansa Logistics Center - Year 2040 Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13400      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.85

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 117.4                                           | 252.5   | 543.9   | 1171.4  |

TABLE Year 2040 Plus Project-05  
FHWA ROADWAY NOISE LEVEL ANALYSIS

RUN DATE: 08/03/2022

ROADWAY SEGMENT: Agua Mansa Road - west of Project Driveway 1

NOTES: Agua Mansa Logistics Center - Year 2040 Plus Project

---

\* \* ASSUMPTIONS \* \*

AVERAGE DAILY TRAFFIC: 13400      SPEED (MPH): 45      GRADE: .5

|          | TRAFFIC DISTRIBUTION PERCENTAGES |         |       |
|----------|----------------------------------|---------|-------|
|          | DAY                              | EVENING | NIGHT |
|          | ---                              | -----   | ----- |
| AUTOS    |                                  |         |       |
|          | 69.50                            | 12.90   | 9.60  |
| M-TRUCKS |                                  |         |       |
|          | 1.44                             | 0.06    | 1.50  |
| H-TRUCKS |                                  |         |       |
|          | 2.40                             | 0.10    | 2.50  |

ACTIVE HALF-WIDTH (FT): 6      SITE CHARACTERISTICS: SOFT

---

\* \* CALCULATED NOISE LEVELS \* \*

CNEL AT 50 FT FROM NEAR TRAVEL LANE CENTERLINE (dB) = 74.85

| DISTANCE (FEET) FROM ROADWAY CENTERLINE TO CNEL |         |         |         |
|-------------------------------------------------|---------|---------|---------|
| 70 CNEL                                         | 65 CNEL | 60 CNEL | 55 CNEL |
| -----                                           | -----   | -----   | -----   |
| 117.4                                           | 252.5   | 543.9   | 1171.4  |

## Parking Lot activity

Noise Level Calculation at nearest property line

| No.     | Stationary Noise Source | Reference (dBA)<br>50 ft | Quantity | Usage<br>factor[1] | Distance from<br>Acoustic Center to<br>Property Line | Ground<br>Effect[2] | Shielding<br>(dBA)[3] | Calculated (dBA) |      | Energy      |  |
|---------|-------------------------|--------------------------|----------|--------------------|------------------------------------------------------|---------------------|-----------------------|------------------|------|-------------|--|
|         |                         | Lmax                     |          |                    |                                                      |                     |                       | Lmax             | Leq  |             |  |
| 1       | parking lot activity    | 70                       | 5        | 1                  | 40                                                   | 1                   | 0                     | 71.9             | 59.9 | 976562.5    |  |
| 2       | parking lot activity    | 70                       | 10       | 1                  | 80                                                   | 1                   | 0                     | 65.9             | 53.9 | 244140.625  |  |
| 3       | parking lot activity    | 70                       | 10       | 1                  | 110                                                  | 1                   | 0                     | 63.2             | 49.7 | 93914.35011 |  |
| 4       | parking lot activity    | 70                       | 10       | 1                  | 145                                                  | 1                   | 0                     | 60.8             | 46.1 | 41002.09111 |  |
| 5       | parking lot activity    | 70                       | 10       | 1                  | 175                                                  | 1                   | 0                     | 59.1             | 43.7 | 23323.61516 |  |
| 6       | parking lot activity    | 70                       | 10       | 1                  | 205                                                  | 1                   | 0                     | 57.7             | 41.6 | 14509.3658  |  |
| 7       |                         |                          |          |                    |                                                      |                     |                       |                  |      |             |  |
| 8       |                         |                          |          |                    |                                                      |                     |                       |                  |      |             |  |
| 9       |                         |                          |          |                    |                                                      |                     |                       |                  |      |             |  |
| 10      |                         |                          |          |                    |                                                      |                     |                       |                  |      |             |  |
| Lmax[4] |                         |                          |          |                    |                                                      |                     |                       | 72               | Leq  | 61          |  |

Notes:

[1] Percentage of time maximum noise levels occur each hour

[2] Soft ground terrain between project site and receptor.

[3] Noise reduction factor due to terrain, landscaping, or structures

[4] Calculated Lmax is the Loudest value.